


#6236

## Security Capacitors


CKT 501-4BDF 16-110 K

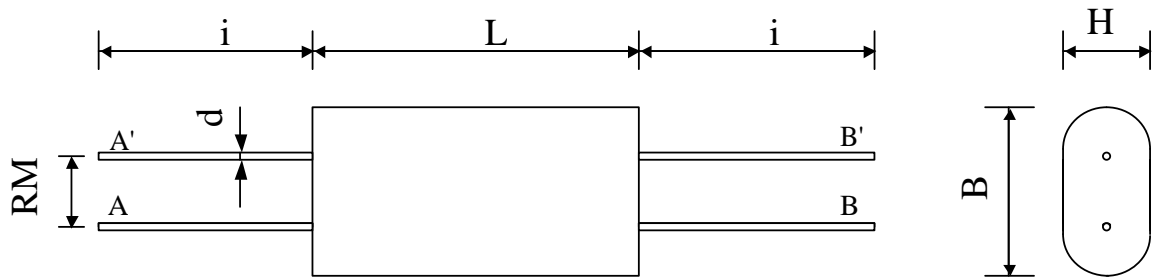

According to NFF 62-102

Dielectric of metallized polyester

Polyester wrapped UL510 / Epoxy resin sealing UL 94-V0



Parameter	Symbol		Value	Unit	Condition
Capacitance	C		10.00	nF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un DC		160	VDC	
Rated voltage	Un AC		100	Veff	50 Hz / 85°C
Tangente delta	tgδ		≤ 70	10 <sup>-4</sup>	1 kHz
Insulation resistance	Ri		> 40.000	MΩ	100 VDC - 1 min
Test voltage between terminals	U T1		256	VDC	10 s
Operating temperature			- 55 / + 125 °C		
Dimension	Symbol			Unit	Conditions
Width	B max		9	mm	
Height	H max		7	mm	
Length	L max		16	mm	
Terminals					
Radial tinned wire	d		0.6	mm	
RM			5.08 ± 1.0	mm	
Length	i		> 25 mm		
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs  
Kondensatoren  
Capacitors

CH 1401 Yverdon-les-Bains  
Tel.: ++41 24 445 66 88  
Fax: ++41 24 445 66 89

**Leclanché**  
Capacitors  
A FRISCHER & TESSIERE COMPANY

HJJ

10.01.2014

faisab6236.XLS