


#6254

Security Capacitors


CKT 501-4BDF 16-2.2 K

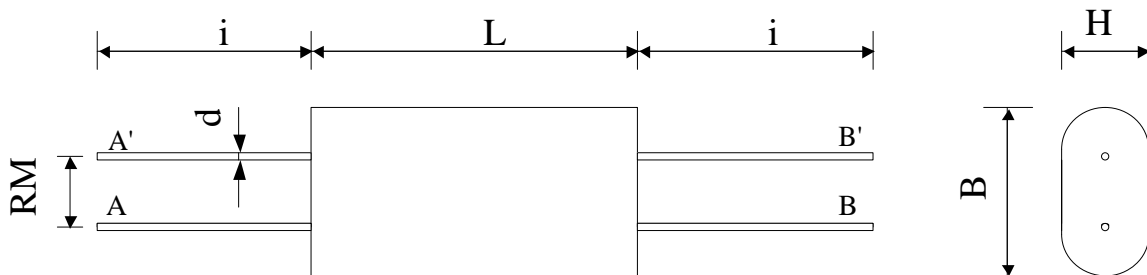

According to NFF 62-102

Dielectric of metallized polyester

Polyester wrapped UL510 / Epoxy resin sealing UL 94-V0



Parameter	Symbol	Value	Unit	Condition
Capacitance	C	2.2	μF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un DC	160	VDC	
Rated voltage	Un AC	100	Veff	50 Hz / 85°C
Tangente delta	tg δ	≤ 70	10^{-4}	1 kHz
Insulation resistance	Ri	$> 4'600$	M Ω	100 VDC - 1 min
Test voltage between terminals	U T1	256	VDC	10 s
Operating temperature		- 55 / + 125 °C		
Dimension	Symbol	Value	Unit	Conditions
Width	B max	17	mm	
Height	H max	13	mm	
Length	L max	34	mm	
Terminals				
Radial tinned wire	d	0.8	mm	
RM		7.62 ± 1.0	mm	
Length	i	> 25 mm		
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs
Kondensatoren
Capacitors

CH 1401 Yverdon-les-Bains
Tel.: ++41 24 445 66 88
Fax: ++41 24 445 66 89

Lecranché
Capacitors
A FRISCHER & TAUSSCHER COMPANY

HJJ

23.01.2014

faisab6254.XLS