


#6239

Security Capacitors


CKT 501-4BDF 4-2.2 K

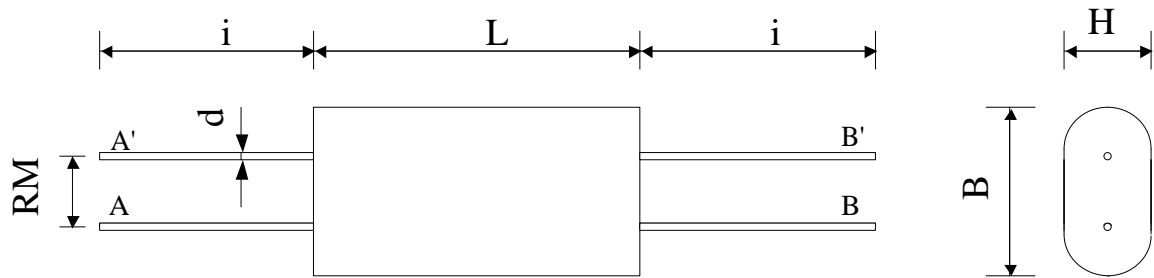

According to NFF 62-102

Dielectric of metallized polyester

Polyester wrapped UL510 / Epoxy resin sealing UL 94-V0



Parameter	Symbol		Value	Unit	Condition
Capacitance	C		2.2	μF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un DC		40	VDC	
Rated voltage	Un AC		25	Veff	50 Hz / 85°C
Tangente delta	tg δ		≤ 70	10^{-4}	1 kHz
Insulation resistance	Ri		> 4550	M Ω	40 VDC - 1 min
Test voltage between terminals	U T1		64	VDC	10 s
Operating temperature			- 55 / + 125 °C		
Dimension	Symbol			Unit	Conditions
Width	B max		15	mm	
Height	H max		9	mm	
Length	L max		17	mm	
Terminals					
Radial tinned wire	d		0.8	mm	
RM			5.08 \pm 1.0	mm	
Length	i		> 25 mm		
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs
Kondensatoren
Capacitors

CH 1401 Yverdon-les-Bains
Tel.: ++41 24 445 66 88
Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FRISCHER & TAUSSCHÉ COMPANY

HJJ

10.01.2014

faisab6239.XLS