


#6196

Security Capacitors


CKT 501-4BDFS 25-22.0 K

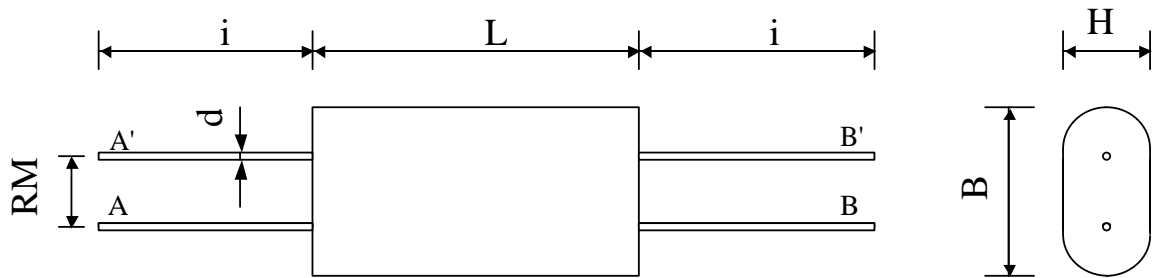

According to NFF 62-102 except for dimensions

Dielectric of metallized polyester

Polyester wrapped UL510 / Epoxy resin sealing UL 94-V0



Parameter	Symbol	Value	Unit	Condition
Capacitance	C	22	μF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un DC	250	VDC	
Rated voltage	Un AC	160	Veff	50 Hz / 85°C
Tangente delta	$\text{tg}\delta$	≤ 80	10^{-4}	1 kHz
Insulation resistance	Ri	> 500	$\text{M}\Omega$	100 VDC - 1 min
Test voltage between terminals	U T1	400	VDC	10 s
Operating temperature		- 55 / + 125 °C		
Dimension	Symbol	Value	Unit	Conditions
Width	B max	35	mm	
Height	H max	20	mm	
Length	L max	45	mm	
Terminals				
Radial tinned wire	d	0.8	mm	
RM		12.7 ± 1.0	mm	
Length	i	> 25 mm		
	M1			
	M0	14.06.2013	HJJ	
	Modification	Date	Visa émetteur	

Condensateurs CH 1401 Yverdon-les-Bains
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FRONIER & TOUSSAINT COMPANY

HJJ

11.06.2013

faisab6196.XLS