



#6253

Security Capacitors

CKT 501-4BG 6-1.0 K





According to NFF 62-102

Dielectric of metallized polyester

Printed circuit board mounting

Self-extinguishing plastic housing

Epoxy resin sealing (UL-V0)

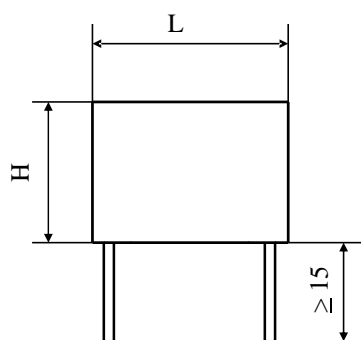

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		1000	nF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un DC		63	VDC	
Rated voltage	Un AC		100	Veff	50 Hz / 85°C
Tangente delta	tg δ		≤ 70	10^{-4}	1 kHz
Insulation resistance	Ri		> 10.000	M Ω	63 VDC - 1 min
Test voltage between terminals	U T1		100	VDC	10 s
Operating temperature			- 55 / + 125 °C		
Dimension	Symbol			Unit	Conditions
Width	B max		16	mm	
Height	H max		11	mm	
Length	L max		19	mm	
Terminals					
Radial tinned wire (4x)	d		0.8	mm	
Y			5.08 ± 0.5	mm	
X			15.24 ± 0.5		
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1401 Yverdon-les-Bains
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TAUSSCHÉ COMPANY

HJJ

21.01.2014

faisab6253.XLS