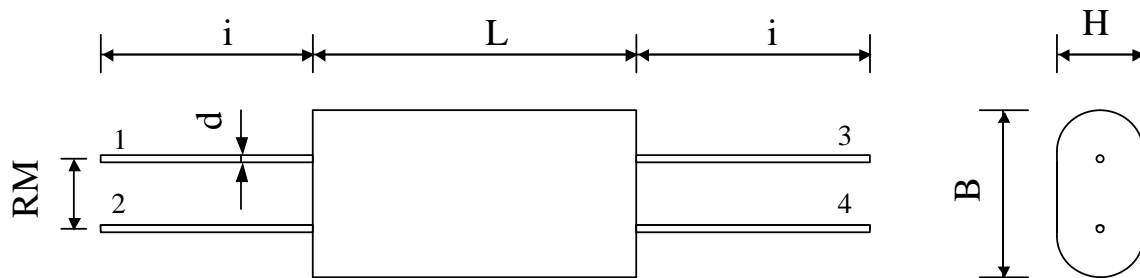


6134


SECURITY CAPACITORS

TYPE
KC-4 150-0168 df K

Partially according to NF F62-102

Film-foil polycarbonate + metal foil

Polyester wrapped / Epoxy resin sealing

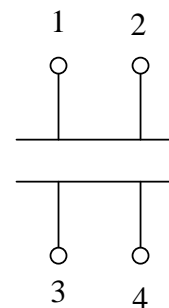

Paramètre	Symbol	Value	Unit	Condition
Capacitance	C	168	nF	20°C, 1 kHz
Tolérance		10	%	
Rated voltage	Un DC	1'500	VDC	
Rated temperature		85	°C	
Tangente delta	tgδ	$< 20 \times 10^{-4}$		1 V 1 kHz
Stray inductance	ESL	≤ 25	nH	
Insulation resistance	Ri	$> 25'000$	MΩ	500 VDC - 1 min
Test voltage between terminals	U T	2'400	VDC	10 s.
Operating temperature		- 55 / + 85 °C		
Dimension	Symbole		Unité	Conditions
Width	B max	35	mm	
Height	H max	20	mm	
Length	L max	52	mm	
Terminals				
Radial tinned wire	d	1	mm	
RM		12.7 ± 2.0	mm	
Lenght	i	≥ 38 mm		
	M2			
	M1			
	MC			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TALSCHER COMPANY

HJJ

www.Lcap.ch
 19.11.2012

capinfo@Lcap.ch
 faisab6134.XLS