


# 5464	FILM-FOIL CAPACITORS	TYPE KP 2000-150 d K
--------	----------------------	-------------------------

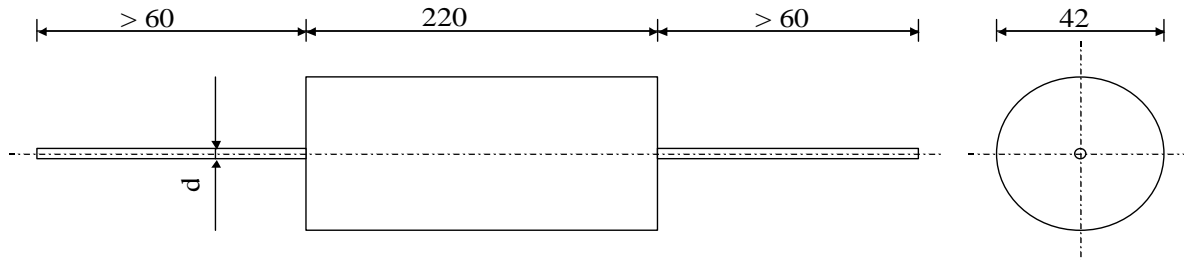

Dielectrique polypropylene
Plastic sleeve / Epoxy resin sealing

Paramètre	Symbol	Value	Unit	Condition
Capacitance	C	50	nF	20°C, 1 kHz
Tolérance		10	%	
Rated voltage	Un DC	20 000	VDC	
Rated voltage	Un AC	2000	VAC	50 Hz ... 12 kHz
RMS Current	I _{eff max.}	8	A _{eff}	f > 12 kHz
Tangente delta	tgδ	≤ 5.0 E-4		1 V / 10 kHz / 20 °C
Stray inductance	ESL	≤ 80	nH	
Insulation resistance	Ri	> 100'000	MΩ	100 VDC - 1 min
Test voltage between terminals	U T1	40 000	VDC	1 min
Climatic category		55/85/56		

Dimension	Symbole	Value	Unité	Conditions
Diameter	∅	42	mm	
Height	H	220	mm	
Terminals				
Axial tinned wire	d	∅ 1.5 x 60	mm	

Valeurs indicatives, sous réserve de modification	M2			
	M1			
	M0			
	Modification	Date	Visa émetteur	