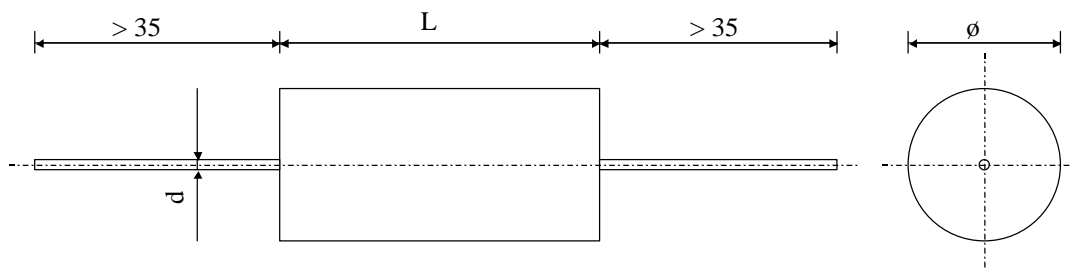


5644

FILM-FOIL CAPACITORS

TYPE
KP 300-110 d K

Dielectrique polypropylene

Polyester wrapped / Epoxy resin sealing

Paramètre	Symbol	Value	Unit	Condition
Capacitance	C	10	nF	20°C, 1 kHz
Tolérance		10	%	
Rated voltage	Un DC	3'000	VDC	
Rated voltage	Un AC	420	VAC	50 Hz to 100 kHz
RMS Current	I _{eff} max.	2.65	A _{eff}	100 kHz
slope of voltage variation	du/dt	35'000	V/μsec	max.
Repetitive surge current	I _{cr.} max	350	A	
Tangent delta	tgδ	≤ 3.0 E-4		1 V / 10 kHz / 20 °C
Stray inductance	ESL	≤ 40	nH	
Insulation resistance	R _i	> 100'000	MΩ	100 VDC - 1 min
Test voltage between terminals	U _{T1}	6'000	VDC	1 min
Climatic category		40/70/56		

Dimension	Symbole	Value	Unité	Conditions
Diameter	∅	21	mm	
Length	L	37	mm	
Terminals				
Axial tinned wire	d	∅ 1.0 x 40	mm	

Valeurs indicatives, sous réserve de modification	M2			
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon-les-Bains
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Le Janché
Capacitors
A FIBCHER & TAUBICHÉ COMPANY

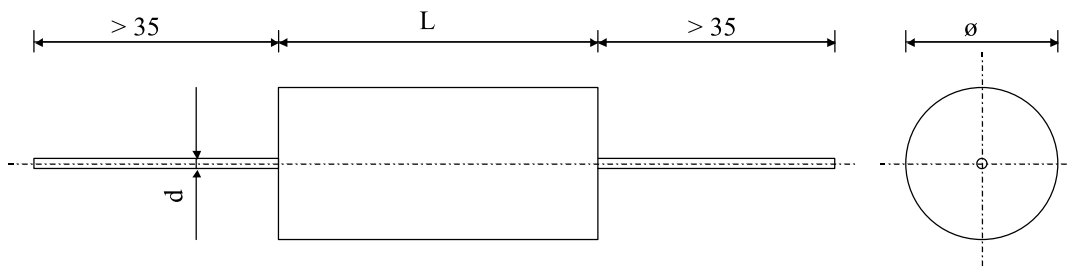
HJJ

01.03.2007

faisab5644.XLS

5642

FILM-FOIL CAPACITORS

TYPE
KP 300-210 d K

Dielectrique polypropylene

Polyester wrapped / Epoxy resin sealing

Paramètre	Symbol	Value	Unit	Condition
Capacitance	C	1	nF	20°C, 1 kHz
Tolérance		10	%	
Rated voltage	Un DC	3'000	VDC	
Rated voltage	Un AC	420	VAC	50 Hz to 100 kHz
RMS Current	I _{eff} max.	0.25	A _{eff}	100 kHz
slope of voltage variation	du/dt	50'000	V/μsec	max.
Repetitive surge current	I _{cr.} max	50	A	
Tangent delta	tgδ	≤ 3.0 E-4		1 V / 10 kHz / 20 °C
Stray inductance	ESL	≤ 40	nH	
Insulation resistance	R _i	> 100'000	MΩ	100 VDC - 1 min
Test voltage between terminals	U T1	6'000	VDC	1 min
Climatic category		40/70/56		

Dimension	Symbole	Value	Unité	Conditions
Diameter	ø	11	mm	
Length	L	37	mm	
Terminals				
Axial tinned wire	d	ø 1.0 x 40	mm	

Valeurs indicatives, sous réserve de modification	M2			
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon-les-Bains
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Le Janché
Capacitors
A FISCHER & TALENGHE COMPANY

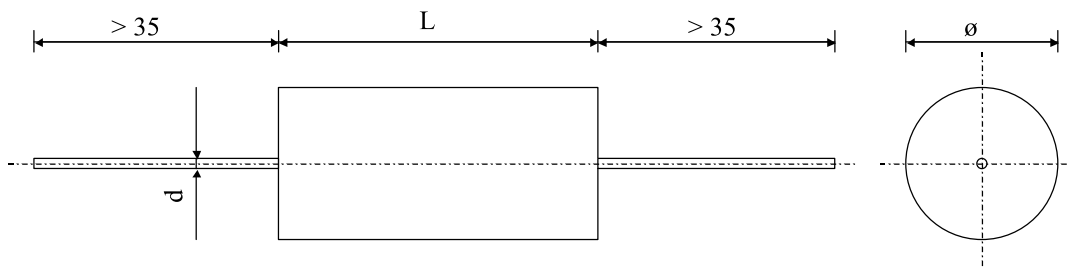
HJJ

01.03.2007

faisab5642.XLS

5643

FILM-FOIL CAPACITORS

TYPE
KP 300-247 d K

Dielectrique polypropylene

Polyester wrapped / Epoxy resin sealing

Paramètre	Symbol	Value	Unit	Condition
Capacitance	C	4.7	nF	20°C, 1 kHz
Tolérance		10	%	
Rated voltage	Un DC	3'000	VDC	
Rated voltage	Un AC	420	VAC	50 Hz to 100 kHz
RMS Current	I _{eff} max.	1.24	A _{eff}	100 kHz
slope of voltage variation	du/dt	35'000	V/μsec	max.
Repetitive surge current	I _{cr.} max	164	A	
Tangent delta	tgδ	≤ 3.0 E-4		1 V / 10 kHz / 20 °C
Stray inductance	ESL	≤ 40	nH	
Insulation resistance	R _i	> 100'000	MΩ	100 VDC - 1 min
Test voltage between terminals	U _{T1}	6'000	VDC	1 min
Climatic category		40/70/56		

Dimension	Symbole	Value	Unité	Conditions
Diameter	ø	16	mm	
Length	L	37	mm	
Terminals				
Axial tinned wire	d	ø 1.0 x 40	mm	

Valeurs indicatives, sous réserve de modification	M2			
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon-les-Bains
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Le Janché
Capacitors
A FISCHER & TALENGHE COMPANY

HJJ

01.03.2007

faisab5643.XLS