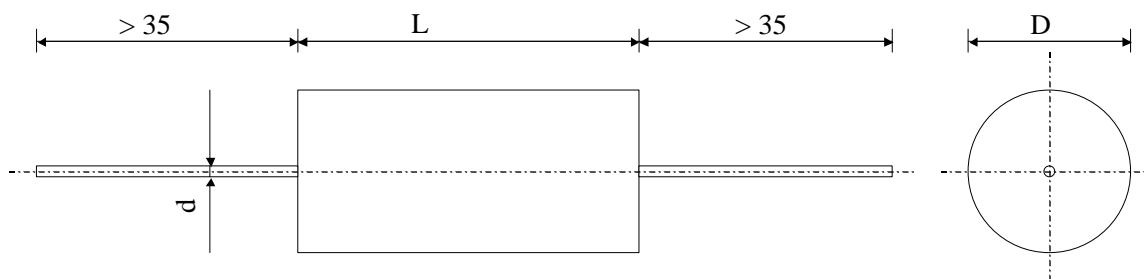


5691

FILM-FOIL CAPACITORS

TYPE
KP 400-530 d M

Dielectrique polypropylene

Polyester wrapped / Epoxy resin sealing

Paramètre	Symbol	Value	Unit	Condition
Capacitance	C	3	pF	20°C, 1 kHz
Tolérance		20	%	
Rated voltage	Un DC	4'000	VDC	
Rated voltage	Un AC	500	VAC	
slope of voltage variation	du/dt	35000	V/μsec	max.
Repetitive surge current	I cr. Max	0.105	A	
Tangente delta	tgδ	≤ 4.0 E-4		1 V / 10 kHz / 20 °C
Stray inductance	ESL	≤ 70	nH	
Insulation resistance	Ri	> 100'000	MΩ	100 VDC - 1 min
Test voltage between terminals	U T1	8'000	VDC	1 min
Climatic category		25/70/56		

Dimension	Symbole	Value	Unité	Conditions
Diameter	D	11	mm	
Length	L	37	mm	
Terminals				
Axial tinned wire	d	∅ 1.0 x 35	mm	

Valeurs indicatives, sous réserve de modification	M2			
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1401 Yverdon-les-Bains
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Le Lancé
Capacitors
A FISCHER & TALSCHER COMPANY

HJJ

03.10.2007

faisab5691.XLS