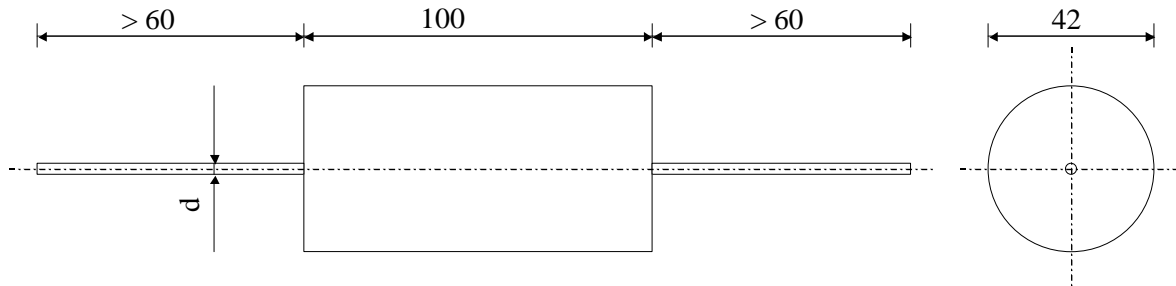


# 5651

## FILM-FOIL CAPACITORS

TYPE  
KP 650-020 d K

Dielectrique polypropylene

Plastic sleeve / Epoxy resin sealing

Paramètre	Symbol	Value	Unit	Condition
Capacitance	C	200	nF	20°C, 1 kHz
Tolérance		10	%	
Rated voltage	Un DC	6500	VDC	
Rated voltage	Un AC	500	VAC	50 Hz to 30 kHz
Repetitive surge current	I cr. Max	1300	A	
RMS Current	I <sub>eff</sub> max.	20	A <sub>eff</sub>	30 kHz
Tangent delta	tgδ	≤ 4.0 E-4		1 V / 10 kHz / 20 °C
Stray inductance	ESL	≤ 30	nH	
Insulation resistance	Ri	> 100'000	MΩ	100 VDC - 1 min
Test voltage between terminals	U T1	12'000	VDC	1 min
Climatic category		25/70/56		

Dimension	Symbole	Value	Unité	Conditions
Diameter	∅	42	mm	
Length	L	100	mm	
Terminals				
Axial tinned wire	d	∅ 1.5 x 60	mm	

Valeurs indicatives, sous réserve de modification	M2			
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon-les-Bains  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Le Lancé**  
**Capacitors**  
A FISCHER & FAUSCHÉ COMPANY

HJJ

19.03.2007

faisab5651.XLS