


6012

**METALLIZED POLYPROPYLENE
+ FILM-FOIL CAPACITORS**

**TYPE
KPS 160-133 ds M**

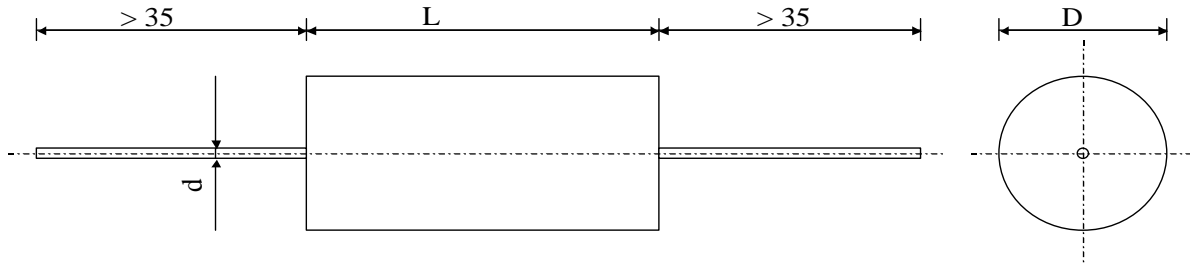

Dielectric: Polypropylene metallized + film + foil

Polyester wrapped UL 510 / Epoxy resin sealing UL 94-V0

Paramètre	Symbol		Value	Unit	Condition
Capacitance	C		33	nF	20°C, 1 kHz
Tolérance			± 20	%	
Rated voltage	Un DC		1'600	VDC	
Rated voltage	Un AC		500	VAC	
rated temperature			70	°C	
RMS Current	I _{eff} max.		5	A _{eff}	100 kHz
Slope of voltage variation	du/dt max.		4'000	V/μs	max. repetitive
Repetitive surge current	I _{cr.} max		132	A	max. repetitive
Tangent delta	tgδ		< 4 E-4		1 v / 1 kHz
Tangent delta	tgδ		< 4 E-4		1 v / 10 kHz
Stray inductance	ESL		≤ 18	nH	
Insulation resistance between terminals	R _i		> 100'000	MΩ	500 VDC - 1 min
Test voltage between terminals	U _{T1}		2'560	VDC	10 s.
Climatic category			40/85/56		

Dimension	Symbole			Unité	Conditions
Diameter	D		16	mm	
Length	L		33	mm	
Terminals					
Axial tinned wire	d		∅ 1.0 x 35	mm	

	M2				
	M1				
	MC				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland

Kondensatoren Tel.: ++41 24 445 66 88

Capacitors Fax: ++41 24 445 66 89

Lecaniché
Capacitors
A FRICKER & TALRICHÉ COMPANY

www.Lcap.ch

capinfo@Lcap.ch

HJJ

23.03.2011

faisab6012.XLS