


#6183

POLYPHENYLENE SULFIDE FILM CAPACITORS

MKS 25-122 gs F

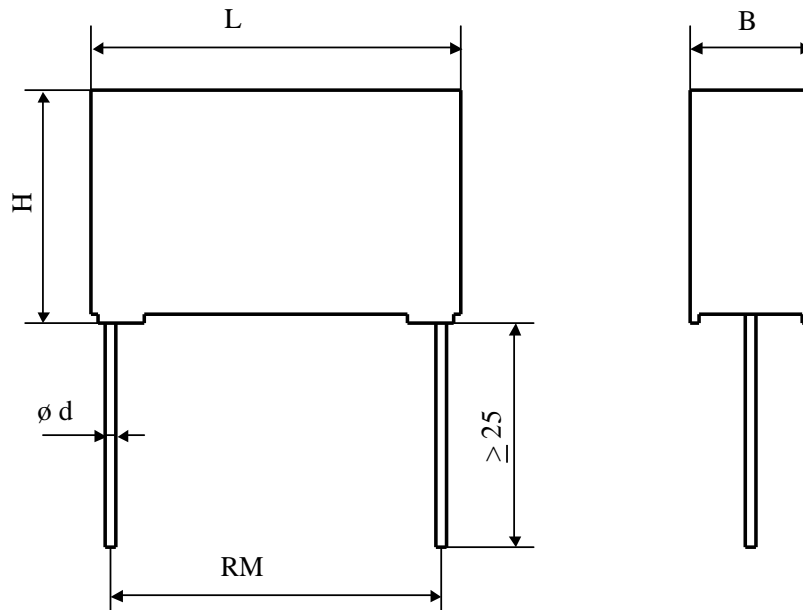

Self-extinguishing plastic housing UL94-V0

Dielectric metallized polyphenylene sulfide - Epoxy resin sealing UL 94-V0

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	0.022	µF	1 V / 1 kHz
Tolerance		± 1	%	
Rated voltage	Un DC	250	VDC	
Rated voltage	Un AC	120	VAC	50 Hz
Rated temperature		85	°C	
slope of voltage variation	du/dt max.	90	V/µsec	max. repetitive
Tangent delta	tgδ	≤ 8	10 ⁻⁴	1 kHz / 23°C
Stray inductance	ESL	≤ 30	nH	
Insulation resistance	Ri	> 30'000	MΩ	100 VDC - 1 min
Test voltage between terminals	U T1	400	VDC	10 s
Climatic category		55/125/21		

Dimension	Symbol	Value	Unit	Conditions
Width	B max	5	mm	
Height	H max	9.5	mm	
Length	L max	11	mm	
Terminals				
Axial tinned wire	d	ø 0.6 x 25	mm	
	RM	7.62 ± 0.5	mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon-les-Bains
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TAUSSCHÉ COMPANY

HJJ

07.05.2013

faisab6183.XLS