
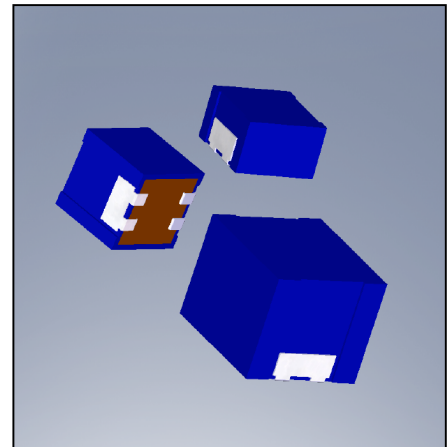




#5859

Power Electronics Capacitors

MKS 4-110 SMD K

PRELIMINARY



Surface mount device - Self-extinguishing plastic housing
Dielectric metallized polyphenylene sulfide - Epoxy resin sealing UL 94-V0

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		0.01	μF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un DC		40	VDC	
RMS current	I RMS max.			A _{eff}	
slope of voltage variation	du/dt max.			V/ μsec	
Repetitive surge current	I cr. max			A	
Tangent delta	tg δ		≤ 20	10^{-4}	1 kHz / 23°C
Equivalent serie resistance	ESR			m Ω	
Stray inductance	ESL			nH	
Insulation resistance	Ri		> 30'000	M Ω	10 VDC - 1 min
Test voltage between terminals	U T1		64	VDC	10 s
Climatic category			55/125/56		
Dimension	Symbol			Unit	Conditions
Width	B max		7.5	mm	
Height	H max		4.5	mm	
Length	L max		8	mm	
Terminals					
	R		2.25 \pm 0.25	mm	
	S		1.0 \pm 0.2	mm	
	T		4.0 \pm 0.2	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon-les-Bains
Kondensatoren Tel.: ++41 24 445 66 88
Capacitors Fax: ++41 24 445 66 89

Le lanché
Capacitors
A FISCHER & TAUSSCHKE COMPANY

HJJ

24.09.2009

faisab5859.XLS