


#5615

HIGH TEMPERATURE FILM CAPACITORS

MKS 50-2.2 df K

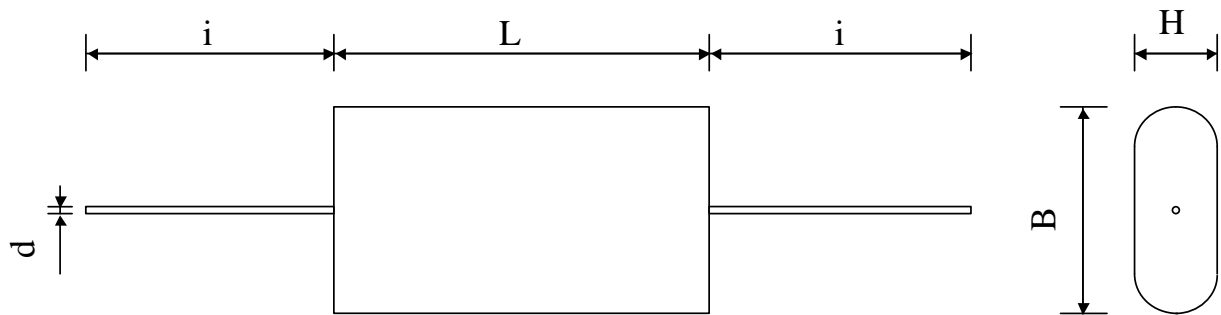

Dielectric of metallized polyphenylene sulfide

Flame retardant polyester wrapped / Epoxy resin sealing UL 94-V0

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		2.2	μF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	U_n DC		500	VDC	
Rated voltage	U_n AC		250	V_{eff}	50 to 800 Hz
RMS current	I RMS ma		9	A_{eff}	10 kHz
slope of voltage variation	du/dt max.		40	V/ μsec	max. repetitive
Repetitive surge current	I cr. max		88	A	
Tangente delta	$\text{tg}\delta$		≤ 6	10^{-4}	1 V / 1 kHz
Tangente delta	$\text{tg}\delta$		≤ 18	10^{-4}	1 V / 10 kHz
Stray inductance	ESL		≤ 50	nH	
Insulation resistance	R_i		> 4500	$M\Omega$	100 VDC - 1 min
Test voltage between terminals	U T1		800	VDC	10 s
Operating temperature			- 55 ... + 125	$^{\circ}\text{C}$	
Dimension	Symbol			Unit	Conditions
Width	B max		33	mm	
Height	H max		23	mm	
Length	L max		33	mm	
Terminals					
Axial tinned wire	d		$\varnothing 1.0 \times 30$	mm	
	M1	22.05.2008	HJJ		
	M0	23.01.2007	HJJ		
	Modification	Date	Visa émetteur		

Condensateurs CH 1401 Yverdon-les-Bains
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Le lanché
Capacitors
A FRISCHMANN & FAUSCHKE COMPANY

HJJ

08.12.2006

faisab5615.XLS