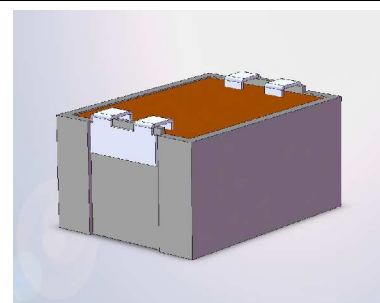
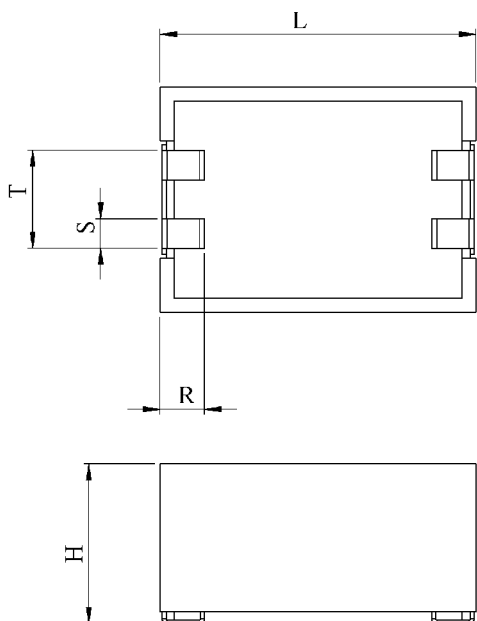



#6324

Power Electronics Capacitors

MKT 10-3.3 SMD K

Preliminary
data sheet

Surface mount device - Self-extinguishing plastic housing

Dielectric metallized polyester - Epoxy resin sealing UL 94-V0

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		3.3	μF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un DC		100	VDC	
Maximum current	I RMS max.		2.7	Aeff	300 kHz / 105 °C
Tangent delta	tg δ		≤ 100	10^{-4}	1 kHz
Equivalent serie resistance	ESR		≤ 15.0	m Ω	300 kHz
Stray inductance	ESL		≤ 10	nH	
Insulation resistance	Ri		> 760	M Ω	100 VDC - 1 min
Test voltage between terminals	U T1		160	VDC	10 s
Operating temperature			-55 to +125	°C	
Dimension	Symbol			Unit	Conditions
Width	B max		11.5	mm	
Height	H max		10	mm	
Length	L max		15.5	mm	
Terminals					
	R		2.25 ± 0.25	mm	
	S		1.5 ± 0.2	mm	
	T		5 ± 0.25	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon-les-Bains
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TAUSSIG COMPANY

HJJ

www.Lcap.ch
 13.08.2014

capinfo@Lcap.ch
 faisab6324.XLS