


#5594

Power Electronics Capacitors

MKT-4 50-4.7 a (K)

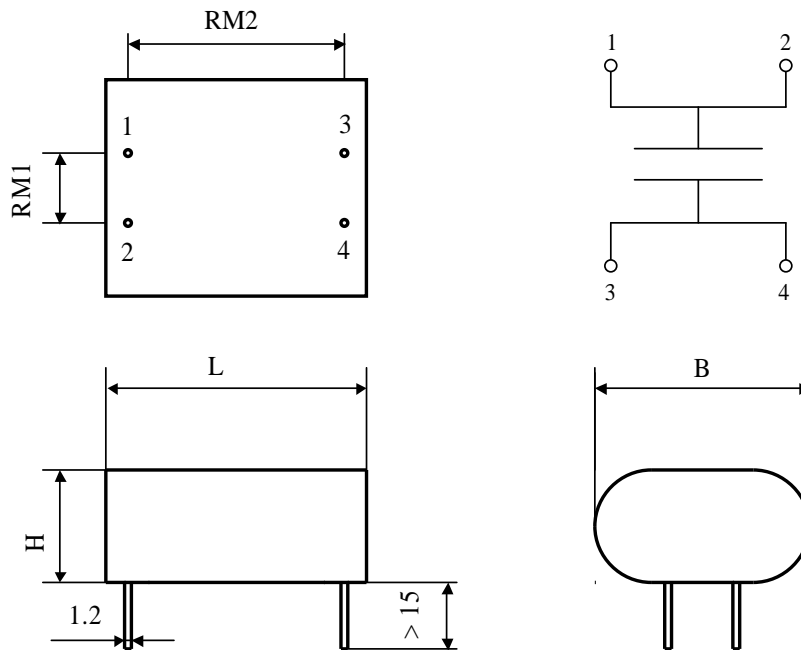

Dielectric : metallized polyester
Polyester wrapped

Epoxy resin sealing

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		4.7	μF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un DC		500	VDC	
Rated voltage	Un AC		160	Veff	50 Hz
RMS current	I RMS max.		5.6	Aeff	100kHz
Tangente delta	tg δ		≤ 80	10^{-4}	1 kHz
Equivalent serie resistance	ESR		≤ 13	m Ω	100 kHz
Stray inductance	ESL		≤ 15	nH	
Insulation resistance	Ri		> 4000	M Ω	100 VDC - 1 min
Test voltage between terminals	U T1		800	VDC	10 s
Climatic category			40/105/56		
Dimension	Symbol			Unit	Conditions
Width	B		30	mm	
Height	H		12	mm	
Length	L		32	mm	
Terminals					
Radial tinned wire	\varnothing		1.2	mm	
RM1			15.4 ± 1	mm	
RM2			27.5 ± 1	mm	
	M1	30.11.2006	FS		
	M0	03.10.2006	HJJ		
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland
Kondensatoren Tel.: ++41 24 445 66 88
Capacitors Fax: ++41 24 445 66 89

Le lanché
Capacitors
A FISCHER & TAUSSCHÉ COMPANY

HJJ

25.09.2006

faisab5594.XLS