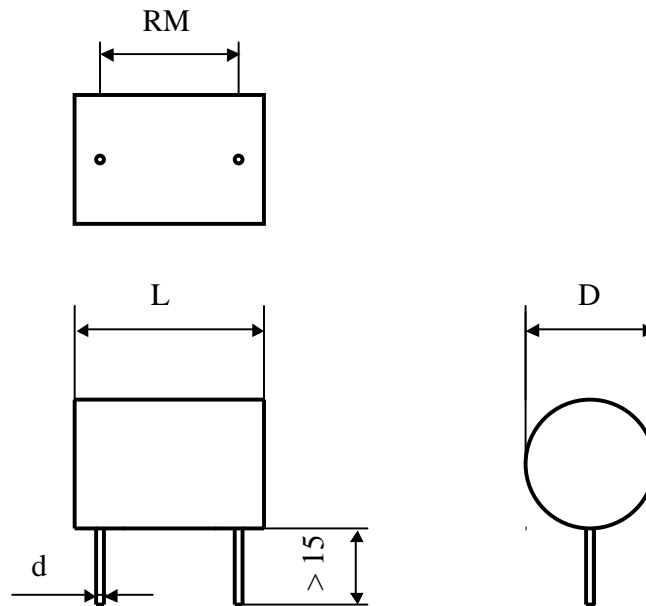


6206

FILM-FOIL CAPACITORS

TYPE
PA 25-047 gS (F)

Dielectrique polystyrene

Polyester wrapped / Epoxy resin sealing

| Paramètre | Symbol | Value | Unit | Condition |
|--------------------------------|--------|----------------------|------|-----------------|
| Capacitance | C | 470 | nF | 20°C, 1 kHz |
| Tolérance | | 1 | % | |
| Rated voltage | Un DC | 250 | VDC | |
| Tangente delta | tgδ | $< 5 \times 10^{-4}$ | | 1 V 1 kHz |
| Stray inductance | ESL | ≤ 30 | nH | |
| Insulation resistance | Ri | $> 100'000$ | MΩ | 100 VDC - 1 min |
| Test voltage between terminals | U T | 500 | VDC | 10 s. |
| Operating temperature | | - 40 / + 70 | °C | |

| Dimension | Symbole | Value | Unité | Conditions |
|-------------------|---------|----------------|-------|------------|
| Diameter | D max | 24 | mm | |
| Lengt | L max | 32 ± 0.5 | mm | |
| Terminals | | | | |
| Axial tinned wire | d | 1 | mm | |
| Raster | RM | 27.5 ± 0.7 | mm | |

M2

M1

MC

Modification

Date

Visa émetteur

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TAUSSCH COMPANY

HJJ

www.Lcap.ch

03.07.2013

capinfo@Lcap.ch

faisab6206.XLS