


#6281

METALLIZED POLYPROPYLENE CAPACITORS

PPM-4 45-83.0 g K

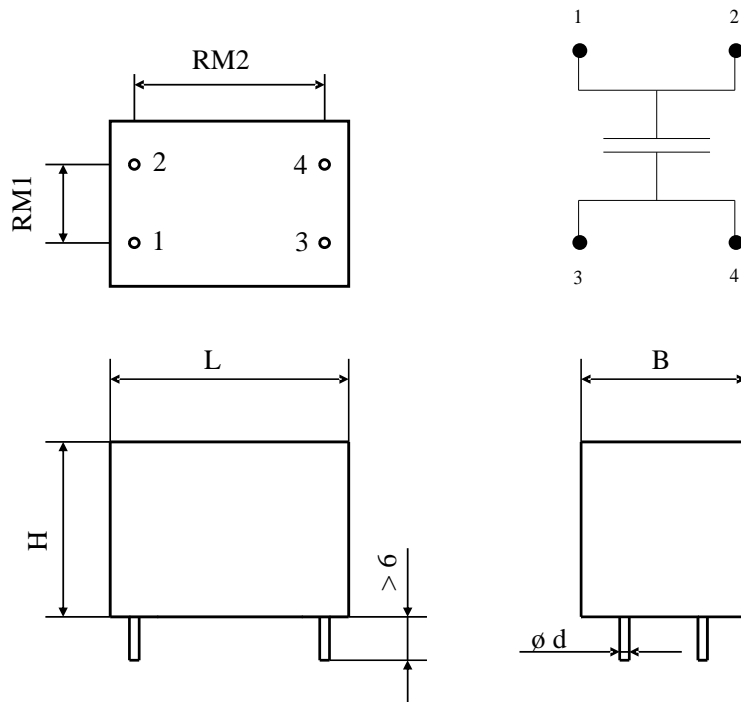

Printed circuit board mounting

Self-extinguishing plastic housing

Epoxy resin sealing

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		83	μF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	U_n DC		450	VDC	
RMS current	I RMS max.	70°C	17	A _{eff}	10 kHz
slope of voltage variation	du/dt max.		10	V/ μsec	max. repetitive
Repetitive surge current	I cr. max		788	A	
Tangent delta	tg δ		< 32	E-4	1 V / 1 kHz
Equivalent serie resistance	ESR		< 5.3	m Ω	10 kHz
Stray inductance	ESL		≤ 15	nH	
Insulation resistance	R _i		> 240	M Ω	100 VDC - 1 min
Test voltage between terminals	U T1		675	VDC	10 s
Operating temperature			- 40 ... + 95°C	°C	
Estimated operational life (-3%)			> 100'000	h	450 V / 70°C
Dimension	Symbol			Unit	Conditions
Width	B		35 \pm 1	mm	
Length	L		58 \pm 1	mm	
Height	H		50 \pm 1	mm	
Terminals tinned wire (4 x)	\varnothing d		1.2	mm	
RM1			20.3 \pm 0.4	mm	
RM2			52.5 \pm 0.4	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FRONER & TAUSSCH COMPANY

HJJ

www.Lcap.ch
 03.04.2014

capinfo@Lcap.ch
 faisab6281.XLS