



#6047



METALLIZED POLYPROPYLENE CAPACITORS

PPM-4 80-30.0 g K

PRELIMINARY



Printed circuit board mounting

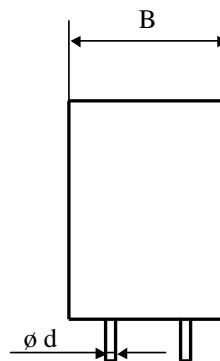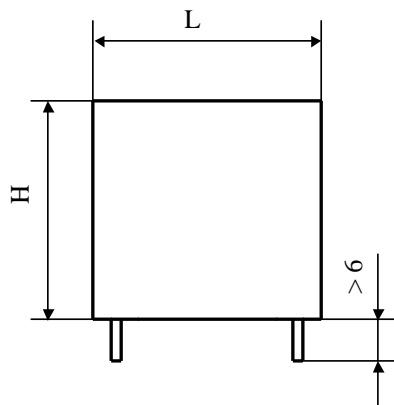

Self-extinguishing plastic housing

Epoxy resin sealing

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	30	$\mu\text{F}$	1 V / 1 kHz
Tolerance		$\pm 10$	%	
Rated voltage	Un DC	800	VDC	
RMS current	I RMS max.	15	Aeff	10 kHz
slope of voltage variation	du/dt max.	22	V/ $\mu\text{sec}$	max. repetitive
Repetitive surge current	I cr. max	704	A	
Tangent delta	tg $\delta$	< 20	E-4	1 V / 1 kHz
Equivalent serie resistance	ESR	< 6.0	m $\Omega$	10 kHz
Stray inductance	ESL	$\leq 15$	nH	
Insulation resistance	Ri	> 938	M $\Omega$	100 VDC - 1 min
Test voltage between terminals	U T1	1'200	VDC	10 s
Test voltage terminals to case	U T2	2'200	VAC	50 Hz / 10 s
Operating temperature		- 40 ... + 85°C	°C	
Estimated operational life (-5 %)		> 100'000	h	Un DC / 70°C

Dimension	Symbol	Value	Unit	Conditions
Width	B max	30	mm	
Length	L max	42.5	mm	
Height	H max	45	mm	
Terminals tinned wire ( 4 x )	$\phi d$	1.2	mm	
RM1		37.5 $\pm$ 0.5	mm	
RM2		20.3 $\pm$ 0.5	mm	
	M1			
	M0	17.10.2011	HJJ	
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Leclanché**  
**Capacitors**  
A FISCHER & TROUSCH COMPANY

HJJ

www.Lcap.ch  
 29.09.2011

capinfo@Lcap.ch  
 faisab6047.XLS