


# 5803	METALLIZED POLYPROPYLENE + FILM-FOIL CAPACITORS	TYPE KPS 63-115 da1 K
--------	--	--------------------------

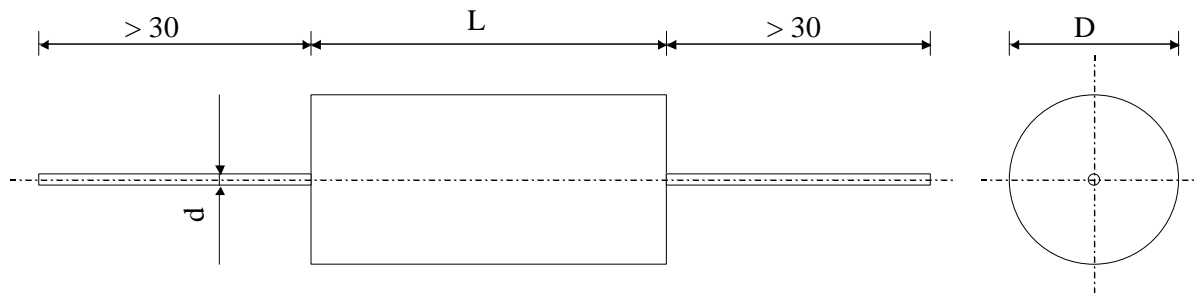

Dielectric: Polypropylene metallized + film + foil

Polyester wrapped UL 510 / Epoxy resin sealing UL 94-V0

Paramètre	Symbol	Value	Unit	Condition
Capacitance	C	15	nF	20°C, 1 kHz
Tolérance		10	%	
Rated voltage	Un DC	630	VDC	
Rated voltage	Un AC	330	VAC	
RMS Current	I _{eff} max.	2.9	A _{eff}	
Slope of voltage variation	du/dt max.	6'500	V/μs	max. repetitive
Repetitive surge current	I cr. max	97.5	A	max. repetitive
Tangent delta dielectric	tgδ _o	2 E-4		
Serial resistance	R _s	4.6	mΩ	
Stray inductance	ESL	≤ 40	nH	
Insulation resistance	R _i	> 100'000	MΩ	100 VDC - 1 min
Test voltage between terminals	U T1	1'000	VDC	60 s.
Climatic category		55/85/56		
Estimated operational life (-3 %)		100'000	h	Un / 70°C

Dimension	Symbole	Value	Unité	Conditions
Diameter	D	12.5	mm	
Length	L	20	mm	
Terminals				
Axial tinned wire	d	∅ 0.8	mm	

Valeurs indicatives, sous réserve de modification	M2			
	M1			
	M0			
	Modification	Date	Visa émetteur	