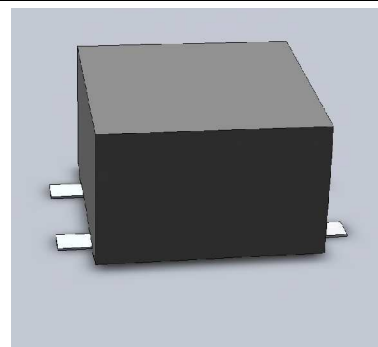
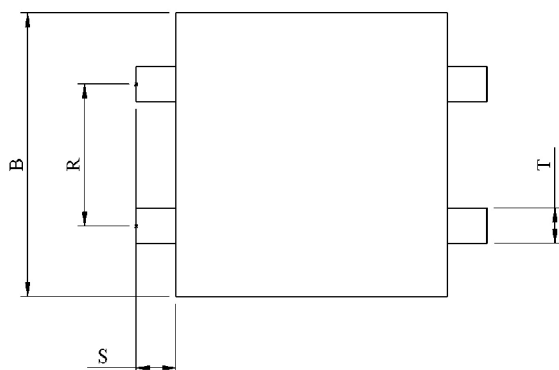
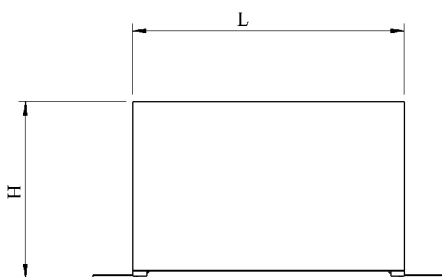


#6288

## Power Electronics Capacitors

MKT 10-10.0 SMG M

Preliminary  
data sheet

Surface mount device - Self-extinguishing plastic housing  
Dielectric metallized polyester - Epoxy resin sealing UL 94-V0  
Measurements and test CECC 30'000- CECC 32'200

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		10	$\mu\text{F}$	1 V / 1 kHz
Tolerance			$\pm 20$	%	
Rated voltage	Un DC		100	VDC	
Maximum current	I RMS max.		7.5	Aeff	100 kHz / 105 °C
Tangent delta	tg $\delta$		$\leq 100$	$10^{-4}$	1 kHz
Equivalent serie resistance	ESR		$\leq 6.8$	m $\Omega$	100 kHz
Stray inductance	ESL		$\leq 9$	nH	
Insulation resistance	Ri		$> 300$	M $\Omega$	100 VDC - 1 min
Test voltage between terminals	U T1		160	VDC	10 s
Climatic category			55/125/21		
Dimension	Symbol			Unit	Conditions
Width	B max		20.5	mm	
Height	H max		12.6	mm	
Length	L max		20.5	mm	
Terminals					
	R		$10 \pm 0.5$	mm	
	S		$3 \pm 0.25$	mm	
	T		$2.6 \pm 0.15$	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon-les-Bains  
Kondensatoren Tel.: ++41 24 445 66 88  
Capacitors Fax: ++41 24 445 66 89

**Leclanché**  
Capacitors  
A FRANCHI & TALLONE COMPANY

HJJ

14.04.2014

faisab6288.XLS