
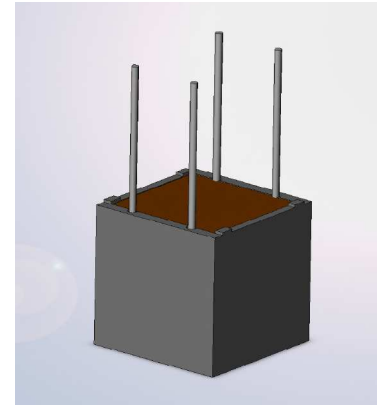


#6084

METALLIZED POLYESTER CAPACITORS

MKT-4 10-22.0 g K

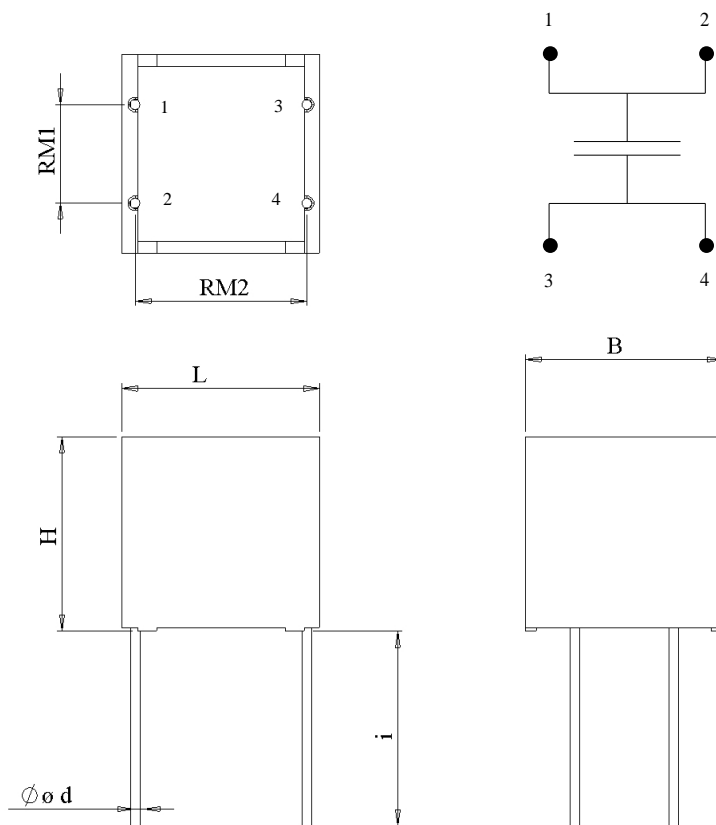

Printed circuit board mounting

Self-extinguishing plastic housing

Epoxy resin sealing

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		22	μF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	$U_n \text{ DC}$		100	VDC	85 °C
RMS current	I RMS max.		9	A _{eff}	150 kHz / 105 °C
RMS current	I RMS max.		0.9	A _{eff}	150 kHz / 125 °C
slope of voltage variation	du/dt max.		21	V/ μsec	max. repetitive
Repetitive surge current	I cr. max		462	A	
Tangent delta	tg δ		< 90	E-4	1 V / 1 kHz
Equivalent serie resistance	ESR		< 4.5	m Ω	150 kHz
Stray inductance	ESL		≤ 9	nH	
Insulation resistance	R _i		> 114	M Ω	100 VDC - 1 min
Test voltage between terminals	U T1		160	VDC	10 s
Climatic category			55/125/21		
Dimension	Symbol			Unit	Conditions
Width	B max		20.5	mm	
Length	L max		20.5	mm	
Height	H max		20	mm	
Terminals tinned wire (4 x)	ϕd		1	mm	
	i		≥ 20	mm	
RM1			10.16 \pm 0.5	mm	
RM2			17.8 \pm 0.5	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TAUSSCHIG COMPANY

HJJ

www.Lcap.ch
 05.03.2012

capinfo@Lcap.ch
 faisab6084.XLS