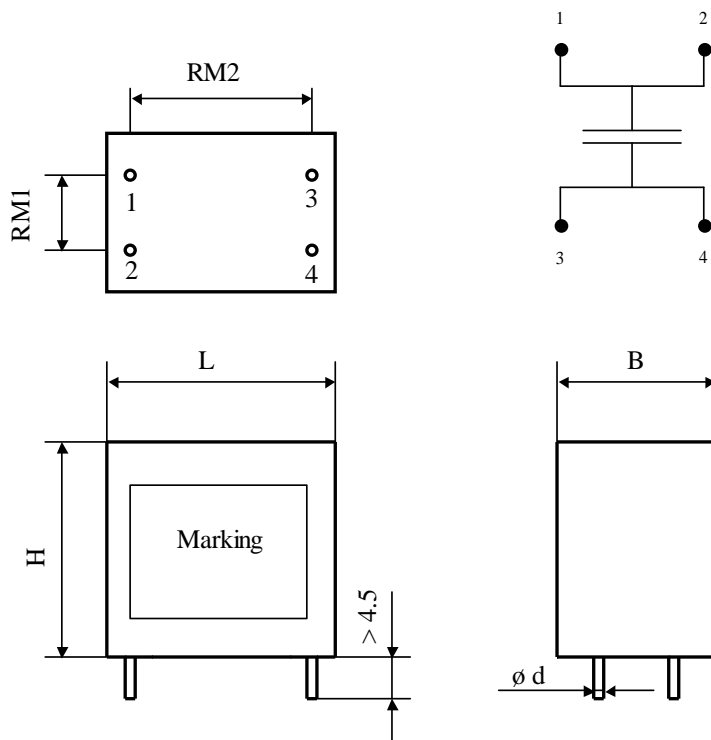


#5777

METALLIZED POLYESTER CAPACITORS

MKT-4 2000-240 g K

Printed circuit board
mountingSelf-extinguishing plastic
housing

Epoxy resin sealing

Mineral oil compatible

ROHS conform

Marking:

MKT-4
2000-240 g
4 nF K +
20 kVDC
date Lcap

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		0.004	μF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un DC		20	kVDC	
Rated voltage	Un AC		1200	VAC	
slope of voltage variation	du/dt max.		20'000	V/μsec	max. repetitive
Repetitive surge current	I cr. max		80	A	
Tangent delta	tgδ		< 100	E-4	1 V / 1 k Hz
Equivalent serie resistance	ESR		< 2	Ω	1 MHz
Stray inductance	ESL		≤ 40	nH	
Insulation resistance	Ri		> 50'000	MΩ	500 VDC - 1 min
Test voltage between terminals	U T1		30'000	VDC	10 s
Operating temperature			- 20 ... + 95	°C	
Dimension	Symbol			Unit	Conditions
Width	B		22 ± 0.3	mm	
Length	L		42.5 ± 0.3	mm	
Height	H max		30	mm	
Terminals tinned wire	ø d		1	mm	
RM1			10 ± 0.5	mm	
RM2			38.1 ± 0.5	mm	
Mass approx			42	g	
	M1				
	M0	20.01.2009	HJJ		
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon-les-Bains
Kondensatoren Tel.: ++41 24 445 66 88
Capacitors Fax: ++41 24 445 66 89

Le lanché
Capacitors
A FISCHER & FAYAT COMPANY

HJJ

19.12.2008

faisab5777.XLS