
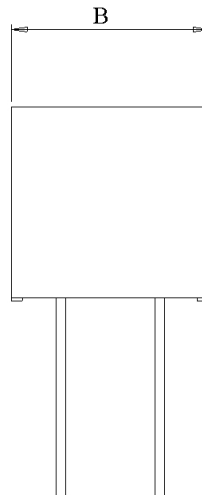
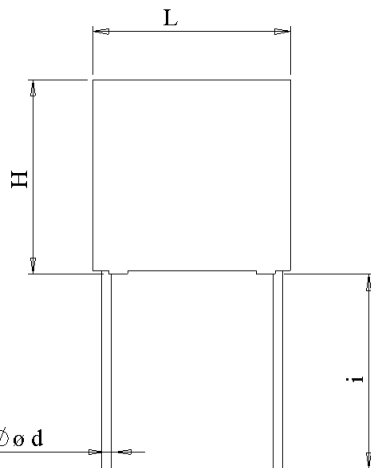
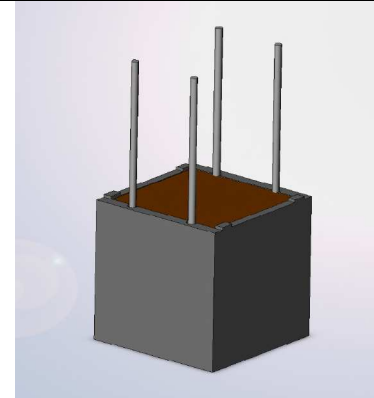



#6085

METALLIZED POLYESTER CAPACITORS

MKT-4 5-39.0 g K



Printed circuit board mounting

Self-extinguishing plastic housing

Epoxy resin sealing

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	39	µF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un DC	50	VDC	85 °C
RMS current	I RMS max.	10.7	A _{eff}	100 kHz / 105 °C
RMS current	I RMS max.	1.07	A _{eff}	100 kHz / 125 °C
slope of voltage variation	du/dt max.	18	V/µsec	max. repetitive
Repetitive surge current	I cr. max	702	A	
Tangent delta	tgδ	< 90	E-4	1 V / 1 kHz
Equivalent serie resistance	ESR	< 3.5	mΩ	100 kHz
Stray inductance	ESL	≤ 9	nH	
Insulation resistance	Ri	> 32	MΩ	50 VDC - 1 min
Test voltage between terminals	U T1	80	VDC	10 s
Climatic category		55/125/21		
Dimension	Symbol	Value	Unit	Conditions
Width	B max	20.5	mm	
Length	L max	20.5	mm	
Height	H max	20	mm	
Terminals tinned wire (4 x)	ø d	1	mm	
	i	≥ 20	mm	
RM1		10.16 ± 0.5	mm	
RM2		17.8 ± 0.5	mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TROUSSE COMPANY

HJJ

www.Lcap.ch
 05.03.2012

capinfo@Lcap.ch
 faisab6085.XLS