


#5986

Power Electronics Capacitors

MKT-4 6-2.2 a K

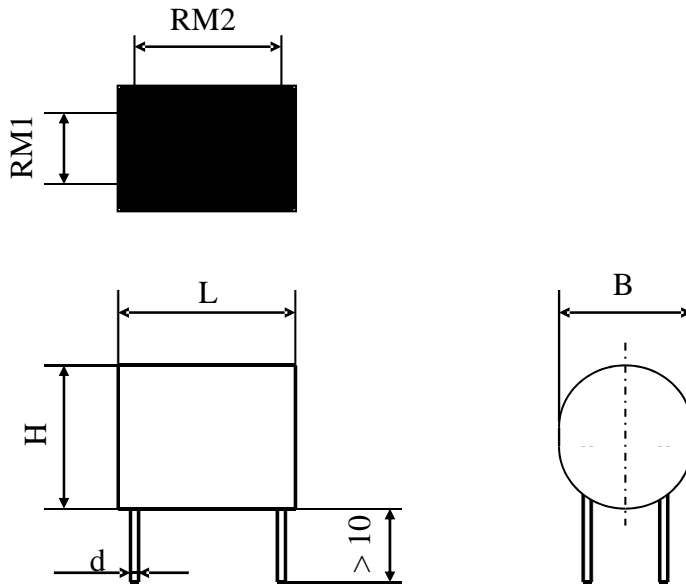

Dielectric : metallized polyester
 Polyester wrapped UL 510
 Epoxy resin sealing UL 94-V0

Manufactured in compliance
 with European Norms
 EN130000 and EN130400

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	2.2	μF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un DC	63	VDC	100 °C
RMS current continuous	I RMS	2.23	Aeff	100 kHz
Slope of voltage variation	du/dt max.	70	V/ μsec	max. repetitive
Repetitive surge current	I cr. max	154	A	
Tangent delta	tg δ	≤ 70	10^{-4}	1 V / 1 kHz
Equivalent series resistance max	ESR	≤ 24	m Ω	100 kHz
Stray inductance	ESL	≤ 20	nH	
Insulation resistance	Ri	> 4600	M Ω	50 VDC - 1 min
Test voltage between terminals	U T1	100	VDC	10 s
Operating temperature		- 55 / + 125 °C		
Dimension	Symbol	Value	Unit	Conditions
Width	B max	10	mm	
Height	H max	13	mm	
Length	L max	10.5	mm	
Terminals				
Radial tinned wire	\varnothing	0.6	mm	
RM1		6.35 ± 0.5	mm	
RM2		7.62 ± 0.5	mm	
	M1			
	M0	15.12.2010	FS	RMS + ESR max
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Lecranché
Capacitors
A FRICKER & TROSCHE COMPANY

HJJ

www.Lcap.ch
 01.12.2010

capinfo@Lcap.ch
 faisab5986.XLS