


#5746

Power Electronics Capacitors

PAM 120-010 dv K

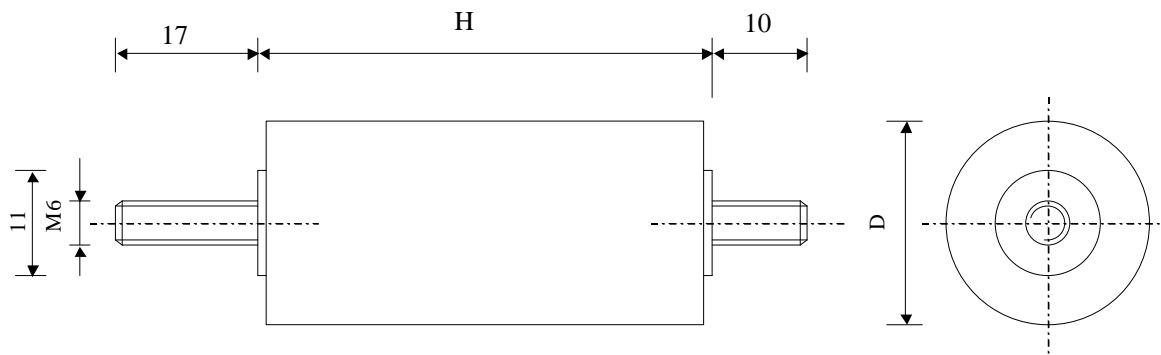

Dielectric of metallized polypropylene - Polyester wrapped

Epoxy resin end sealing - Threaded outputs

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		0.1	μ F	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un AC		1200	VAC	
RMS Current	I _{eff max}		3	A	10 kHz
slope of voltage variation	du/dt max.		500	V/ μ sec	max. repetitive
Repetitive surge current	I cr. max		50	A	
Tangent delta	tg δ		4	10^{-4}	1 V / 10 kHz
Stray inductance	ESL		≤ 15	nH	
Insulation resistance	Ri x C		> 20'000	s	500 VDC - 1 min
Test voltage between terminals	U T1		4500	VDC	1 min
Climatic category (IEC68)			25/70//56		
Estimated operational life (-3%)			30'000	h	Un AC - 70°C
Dimension	Symbol			Unit	Conditions
Diameter	\varnothing D		20	mm	
Height	H		53 \pm 1	mm	
Terminals					
Thread (1 x)			M6 x 10	mm	
Thread (1 x)			M6 x 17	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon-les-Bains
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Le Janché
Capacitors
A FRODNER & FAUSCHÉ COMPANY

HJJ

15.08.2008

faisab5746.XLS