


#6077

METALLIZED POLYPROPYLENE CAPACITORS

PAM 27-55.0 cv3 K

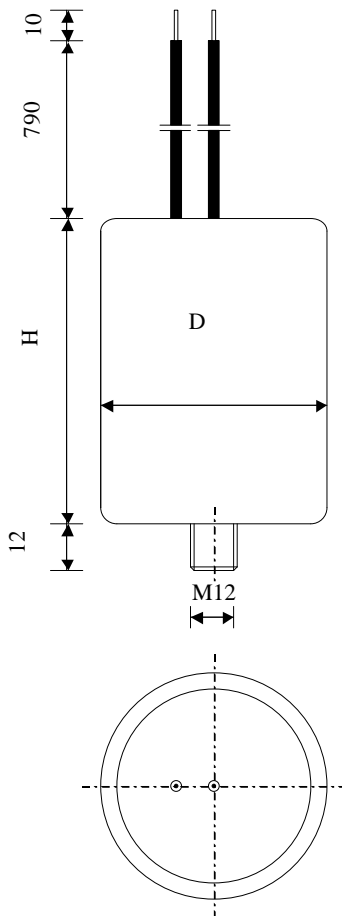

Parallel internal resistance  
39 k $\Omega$  / 3 W

Dielectric of metallized  
polypropylene

Polyurethane resin end sealing

Aluminium case

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	55	$\mu$ F	1 V / 1 kHz
Tolerance		$\pm 10$	%	
Rated voltage	Un AC	270	VAC	50 / 60 Hz
Tangent delta	tg $\delta$	$\leq 13$	1C <sup>4</sup>	1 V / 100 Hz
Test voltage between terminals	U T1	600	VDC	1 min
Test voltage terminals to case	U T2	2500	VAC	50 Hz / 1 min
Dimension	Symbol		Unit	Conditions
Diameter	D	60	mm	
Height	H	100	mm	
Terminals				
Cable		800	mm	
section		1.23	mm <sup>2</sup>	
fixing stud		M12 x 12	mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon-les-Bains  
Kondensatoren Tel.: ++41 24 445 66 88  
Capacitors Fax: ++41 24 445 66 89

**Leclanché**  
**Capacitors**  
A FISCHER & TAUSSIG COMPANY

HJJ

www.Lcap.ch  
16.01.2012

capinfo@Lcap.ch  
faisab6077.XLS