


#5678

## Filtering Capacitors

PAM 69-3x186 r K

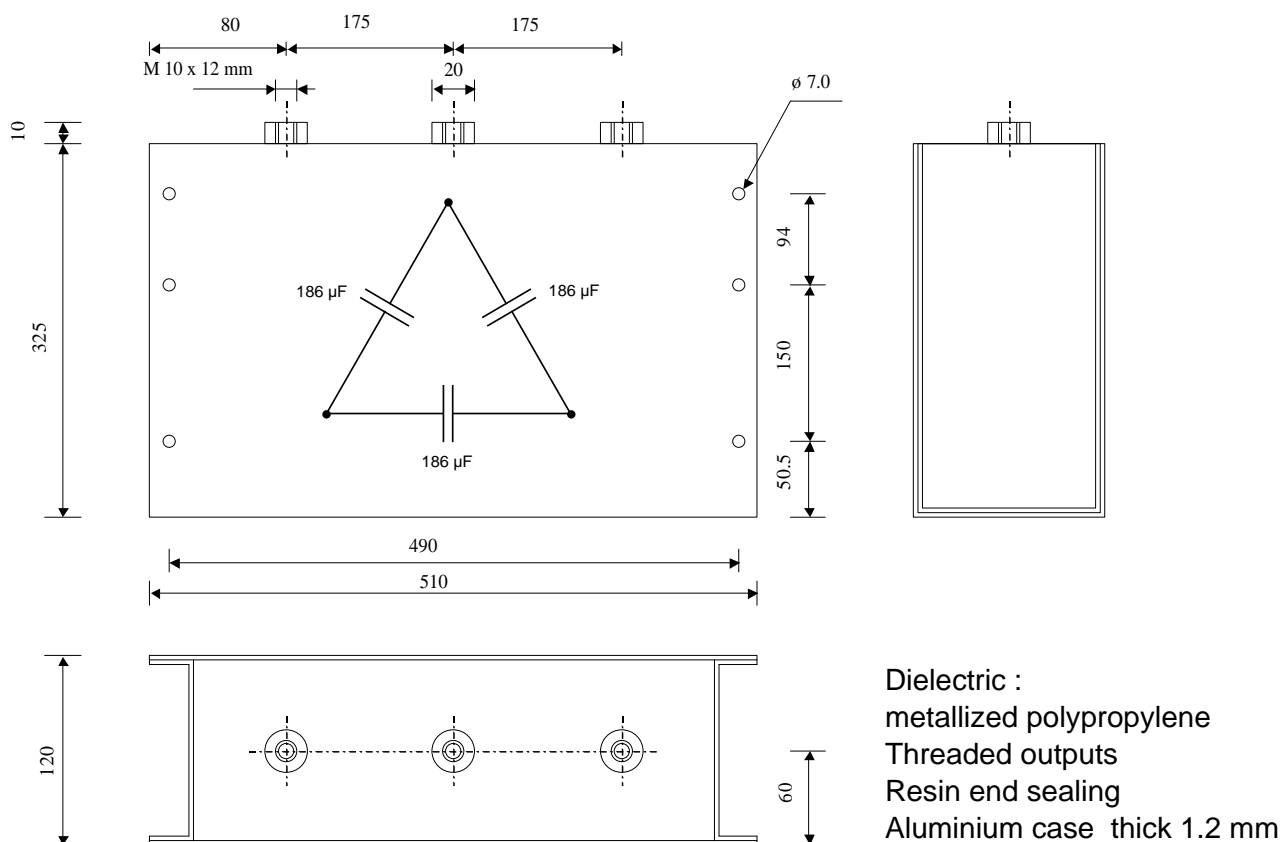

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		3 x 186	$\mu\text{F}$	1 V / 100 Hz
Tolerance			$\pm 10$	%	
Maximum rated voltage	Ur		1'100	VAC	
Nominal voltage	Un		690	V RMS	
Voltage peak to peak	U <sub>pp</sub>		2'600	V	
Peak voltage	Us max.		1'700	V	
RMS Current	I <sub>eff max</sub>		200	A <sub>eff</sub>	1 to 20 kHz
Surge current	I <sub>s</sub>		1000	A	non rep.
Insulation resistance	R <sub>i</sub> x C		> 20'000	s	500 VDC - 1 min
Test voltage between terminals	U T1		3'000	VDC	60 s
Test voltage between terminals to case	U T2		3'000	VAC	60 s
Climatic category (IEC 60068)			40/70/56		
Estimated operational life (-5%)			100'000	h	50°C
Dimension	Symbol			Unit	Condition
Width	B		120	mm	
Length	L		510	mm	
Height	H		325	mm	
Thread			3 x M10 x 12	mm	
Thread spacing			175	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs  
Kondensatoren  
Capacitors

CH 1401 Yverdon-les-Bains  
Tel.: ++41 24 445 66 88  
Fax: ++41 24 445 66 89

**Le Lanché**  
**Capacitors**  
A FISCHER & TALENCHÉ COMPANY

HJJ

04.07.2007

faisab5678.XLS