


**METALLIZED POLYPROPYLENE CAPACITORS**

**PAMC 50-22.0 cv2 K**

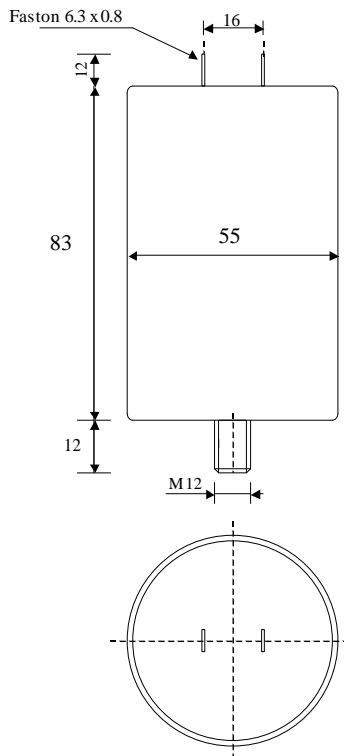

Dielectric of metallized polypropylene

Fast-on connections

Resin end sealing UL 94V-0

Aluminium case

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	22	μF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un DC	1000	VDC	
Rated voltage	Un AC	500	VAC	
Surge Voltage	Us	1500	VDC	
Series Resistance	Resr	< 2	mΩ	
Test voltage between terminals	U <sub>tt</sub>	1400	VDC	10 s
Test voltage terminals to case	U <sub>tc</sub>	3300	VAC	50 Hz / 10s
Climatic category		40/085/21		
Estimated lifetime hotspot 60°C		30k	h	

Dimension	Symbol	Value	Unit	Conditions
Diameter	D	55	mm	±1mm
Height	H	83	mm	±2mm
Pitch	e	16	mm	±0.5mm
Fixing stud		M 12x12	mm	

	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland  
 Kondensatoren Tel.: +41 24 445 66 88  
 Capacitors capinfo@Lcap.ch



FS