


**METALLIZED POLYPROPYLENE CAPACITORS**

**PPM 100-390.0 cv6 (K)**

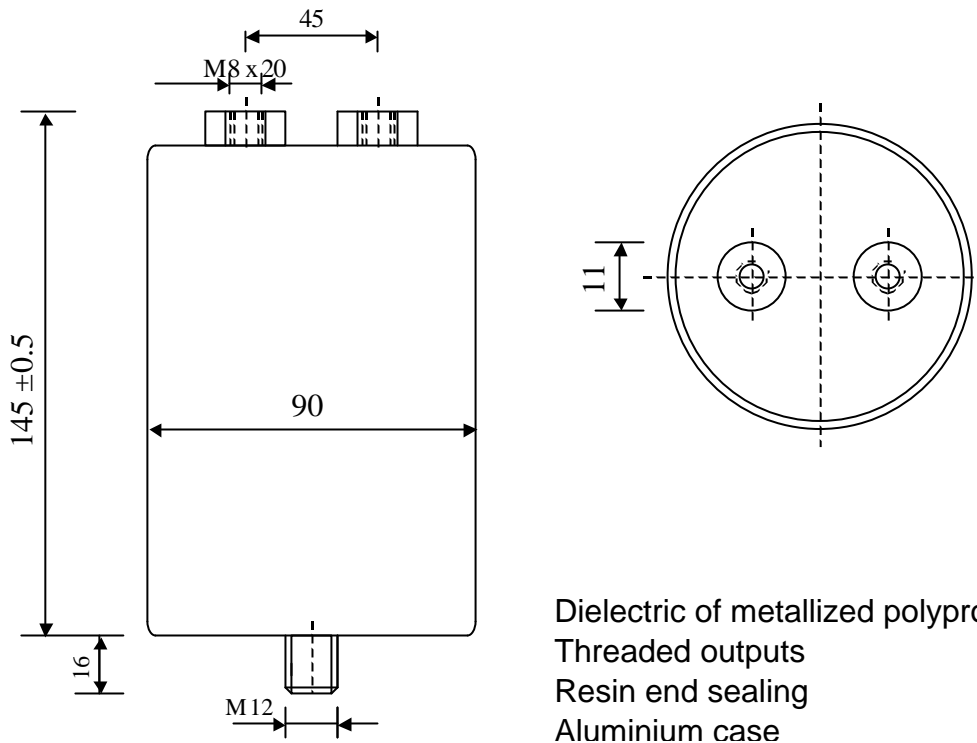

Dielectric of metallized polypropylene  
 Threaded outputs  
 Resin end sealing  
 Aluminium case

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	390	μF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un DC	1000	VDC	
Current Rating	I <sub>N</sub>	60	A	@ 60°C
Tangente delta	tgδ			
Equivalent series resistance	ESR			
Self inductance	ESL			
Insulation resistance	Ri x C			
Test voltage between terminals	U T1	1650	VDC	10 s
Test voltage terminals to case	U T2	4000	VAC	50 Hz / 1 min
Climatic category		40/085/21		

Dimension	Symbol	Value	Unit	Condition
Diameter	D	90	mm	
Height	H	145	mm	
Terminals				
Thread		M8 x 20	mm	
Thread spacing		45	mm	
Fixing stud		M12 x 16	mm	

	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon-les-Bains  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Le lanché**  
**Capacitors**  
A FIESSER & TAUSSIG COMPANY

FS 20.08.2008