


#6002

Metallized polypropylene capacitors

PPM 100-60.0 r K

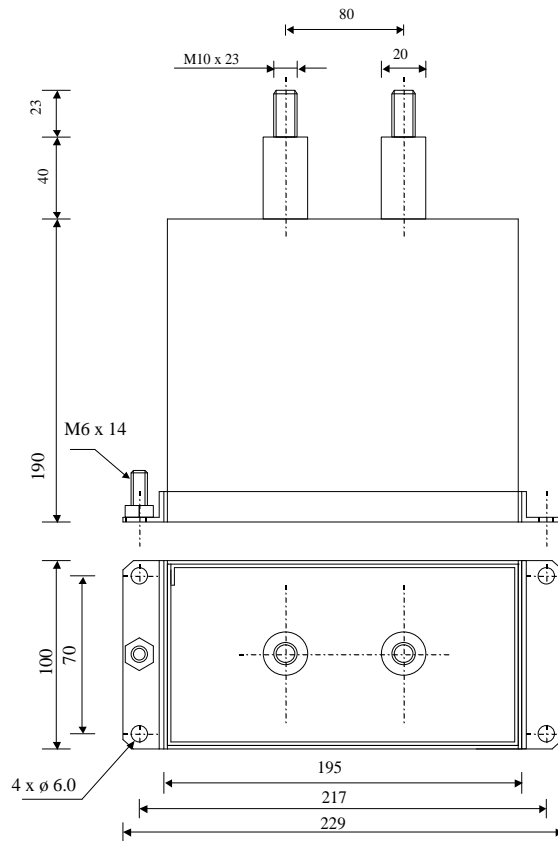

Dielectric of metallized polypropylene

Threaded outputs

Resin end sealing

Aluminium case thick 1.2 mm

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	60	μF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un DC	1'000	VDC	
Rated voltage	Un AC	700	Veff	50 to 100 Hz
RMS Current	Ieff	40	Aeff	10 kHz
slope of voltage variation	du/dt max.	110	V/ μsec	max. repetitive
Repetitive surge current	I cr. max	6600	A	
Tangent delta	tg δ	5C	1C ⁴	1 V / 1 kHz
Equivalent serie resistance	ESR	≤ 13	m Ω	10 kHz
Stray inductance	ESL	≤ 90	nH	
Insulation resistance	Ri x C	> 20'000	s	500 VDC - 1 min
Test voltage between terminals	U T1	3'500	VDC	10 s
Test voltage between terminals to case	U T2	10'000	VAC	50 Hz / 1 min
Operating temp.		- 25 / + 70 °C		
Estimated operational life (-3%)		200'000	h	Un DC / 70°C

Dimension	Symbol	Value	Unit	Conditions
Width	B	100	mm	
Length	L	195	mm	
Height	H	190	mm	
Thread		M 10 x 23	mm	
Thread spacing		80	mm	

	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TAUSSCH COMPANY

HJJ

www.Lcap.ch
 27.01.2011

capinfo@Lcap.ch
 faisab6002.XLS