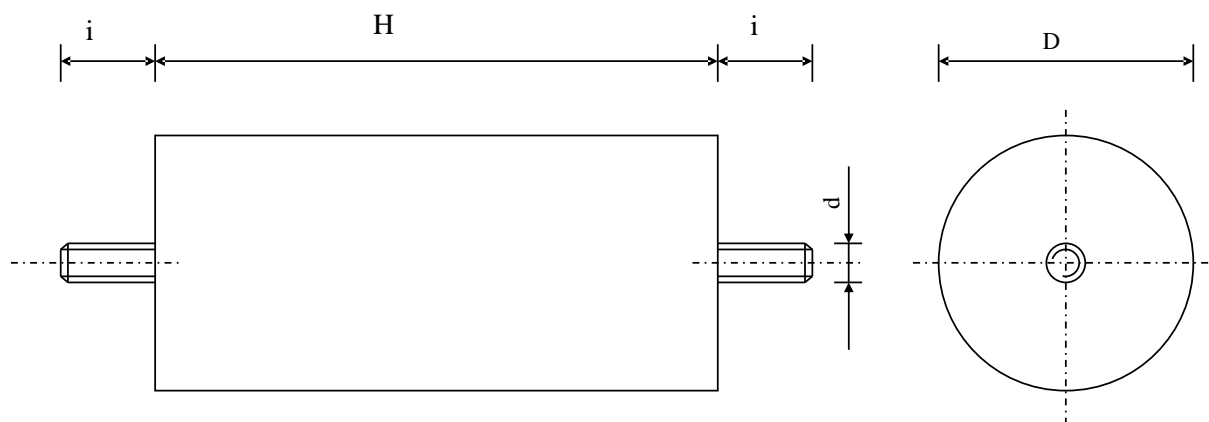


#6261

METALLIZED POLYPROPYLENE CAPACITORS

PPM 200-20.0 $\mu\text{V K}$ 

Dielectric of metallized polypropylene - Plastic tube
resin end sealing - Threaded outputs

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	20.0	μF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un DC	2'000	VDC	
Rated voltage	Un AC	250	VRMS	400 Hz
slope of voltage variation	du/dt max.	25	V/ μsec	max. repetitive
Repetitive surge current	I cr. max	500	A	
Maximum RMS current	I RMS	12.5	Aeff	400 Hz
Tangent delta	tg δ	≤ 30	10^{-4}	1 V / 1 kHz
Stray inductance	ESL	≤ 70	nH	
Test voltage between terminals	U T1	3'000	VDC	10 s.
Operating Temperature		-25 to + 70	$^{\circ}\text{C}$	
Estimated operational life		> 100'000	h	2000 V / 65 $^{\circ}\text{C}$

Dimension	Symbol	Value	Unit	Conditions
Diameter	D	40	mm	
Height	H	171 \pm 0.5	mm	
Terminals				
Thread	d	M6	mm	
	i	20 \pm 1.0	mm	
	M1			
	M0			
Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland
Kondensatoren Tel.: ++41 24 445 66 88
Capacitors Fax: ++41 24 445 66 89

Lecclanché
Capacitors
A. FRECHER & SAUSCHER COMPANY

HJJ

www.Lcap.ch
20.02.2014

capinfo@Lcap.ch
faisab6261.XLS