


#6243

METALLIZED POLYPROPYLENE CAPACITORS

PPM 25-110 gs J

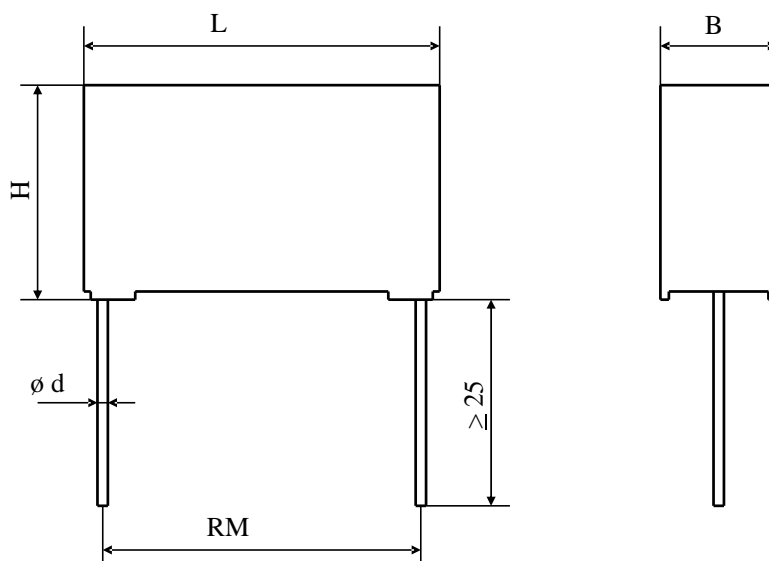

Dielectric of metallized polypropylene

Self-extinguishing plastic housing / Epoxy resin sealing

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		10	nF	1 V / 1 kHz
Tolerance			± 5	%	
Rated voltage	Un DC		250	VDC	
Rated voltage	Un AC		160	VAC	50 Hz to 100 Hz
RMS Current permanent	I _{eff} max.		0.22	A _{eff}	30 kHz
slope of voltage variation	du/dt max.		200	V/μsec	max. repetitive
Repetitive surge current	I _{cr} max		2	A	
Tangente delta	tgδ		8	10 ⁻⁴	1 V / 1 kHz
Stray inductance	ESL		≤ 25	nH	
Insulation resistance	Ri		> 100'000	MΩ	100 VDC - 1 min
Test voltage between terminals	U T1		400	VDC	10 s
Climatic category			55/85/56		
Estimated operational life (-3%)			100'000	h	Un DC - 70°C
Dimension	Symbol			Unit	Conditions
Width	B		5	mm	
Height	H		9.5	mm	
Length	L		11	mm	
Terminals					
Axial tinned wire	d		ø 0.6	mm	
	RM		7.62 ± 0.5	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FRICKER & TAUSSIG COMPANY

HJJ

www.Lcap.ch
 14.01.2014

capinfo@Lcap.ch
 faisab6243.XLS