
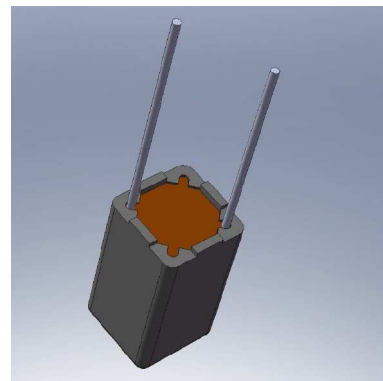


#6175

METALLIZED POLYPROPYLENE CAPACITORS

PPM 25-122 hs F

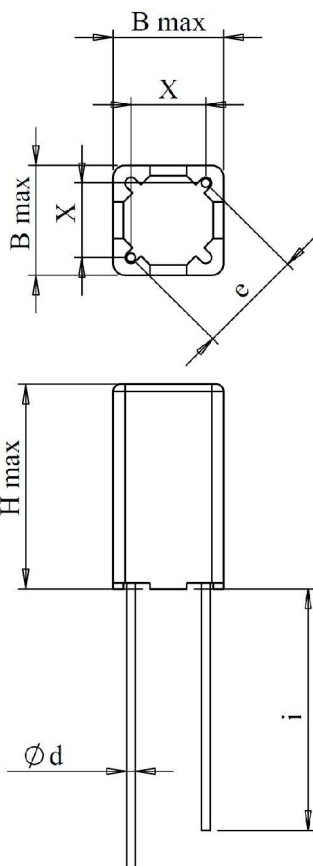

Dielectric of metallized polypropylene

Self-extinguishing plastic housing

Epoxy resin sealing

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		22	nF	1 V / 1 kHz
Tolerance			± 1	%	
Rated voltage	Un DC		250	VDC	
Rated voltage	Un AC		180	VAC	50 Hz
slope of voltage variation	du/dt max.		150	V/µsec	max. repetitive
Tangente delta	tgδ		6	10 ⁻⁴	1 V / 1 kHz
Stray inductance	ESL		≤ 40	nH	
Insulation resistance	Ri		> 100'000	MΩ	100 VDC - 1 min
Test voltage between terminals	U T1		400	VDC	10 s
Climatic category			55/85/56		
Estimated operational life (-3%)			100'000	h	250 V - 70°C
Dimension	Symbol			Unit	Conditions
Width	B max		7.5	mm	
Height	H max		14	mm	
Length	B max		7.5	mm	
Terminals					
Axial tinned wire	d		0.6	mm	
	i		30 ± 2.0	mm	
Raster	e		7.2 ± 0.3	mm	
	X		5.08	mm	
	M1				
	M0				
Modification	Date		Visa émetteur		

Condensateurs CH 1401 Yverdon-les-Bains
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FRISCHER & TEBUSCH COMPANY

HJJ

22.04.2013

faisab6175.XLS