


#5539

METALLIZED POLYPROPYLENE CAPACITORS

PPM 50-650.0 cv6 K

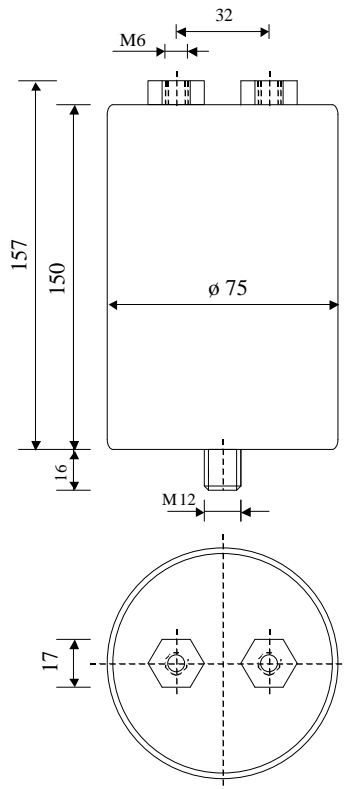

Dielectric of metallized polypropylene

Threaded outputs

Resin end sealing

Aluminium case

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	650	$\mu\text{F}$	1 V / 1 kHz
Tolerance		$\pm 10$	%	
Rated voltage	Un DC	500	VDC	
RMS Current	I <sub>eff max.</sub>	47.5	A <sub>eff</sub>	Temp. Amb. max 25°C
RMS Current	I <sub>eff max.</sub>	36.6	A <sub>eff</sub>	Temp. Amb. max 50°C
RMS Current	I <sub>eff max.</sub>	20.5	A <sub>eff</sub>	Temp. Amb. max 75°C
Repetitive surge current	I cr. max	4100	A	
Tangente delta	tg $\delta$	$\leq 200$	$10^{-4}$	1 V / 1 kHz
Equivalent serie resistance	ESR	5	m $\Omega$	1 V / 10 kHz
Stray inductance	ESL	$\leq 100$	nH	
Insulation resistance	Ri x C	$\geq 20'000$	s	300 VDC - 1 min
Test voltage between terminals	U T1	800	VDC	10 s
Test voltage terminals to case	U T2	2500	VAC	50 Hz / 1 min
Climatic category		55/105/56		

Dimension	Symbol	Value	Unit	Condition
Diameter	D	75	mm	
Height	H	150	mm	
Terminals				
Thread		M6 x 6	mm	
Thread spacing	e	32	mm	
Fixing stud		M12 x 16	mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1401 Yverdon-les-Bains  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Le lanché**  
**Capacitors**  
A FISCHER & TAUSSIG COMPANY

HJJ

01.02.2006

faisab5539.XLS