
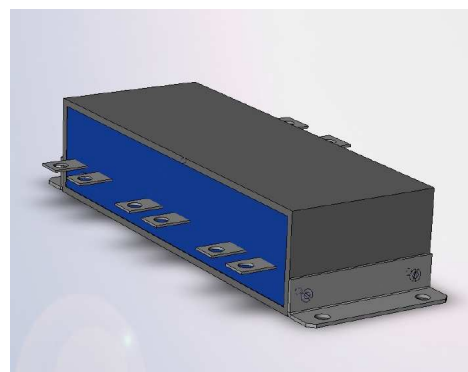
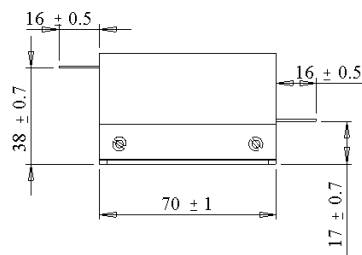


#6154

METALLIZED POLYPROPYLENE CAPACITORS

PPM 54-120.0 ru J

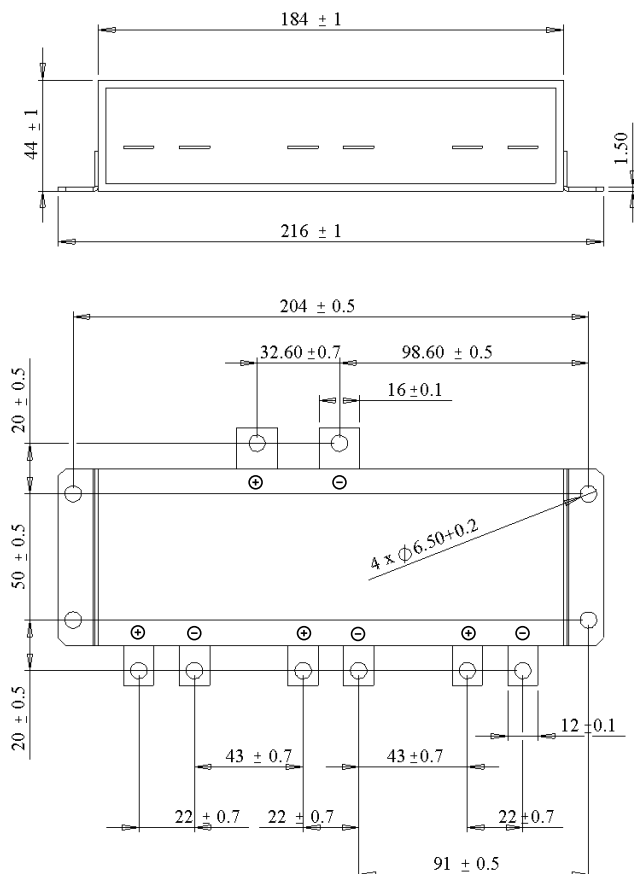

Dielectric polypropylene metallized

Plastic case

polyurethan resin filled

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		120	μF	1 V / 1 kHz
Tolerance			± 5	%	
Rated voltage	Un DC		540	VDC	
Maximum voltage	U max		740	V	
Nominal current	I RMS		85	A	20 kHz
maximum current	I RMS max.		100	A	60 s.
slope of voltage variation	du/dt max.		15	V/ μsec	
Repetitive surge current	I cr. max		1800	A	
Equivalent Serie Resistance	ESR		< 0.8	m Ω	1 V / 10 kHz
Stray inductance	ESL		≤ 22	nH	
Insulation resistance	Ri x C		$> 10'000$	s	500 VDC - 1 min
Test voltage between terminals	U t1		1'000	VDC	1 min
Test voltage terminals to case	Ut2		2'500	VAC	50 Hz - 1 min
Operating temperature			- 50 / + 100	$^{\circ}\text{C}$	
Maximum hot-spot temperature			105	$^{\circ}\text{C}$	
Estimated operational life 85 A RMS / 20 kHz			$> 100'000$	h	540 V / 55 $^{\circ}\text{C}$
Dimension	Symbol			Unit	Conditions
Width	B		70	mm	
Height	H		44	mm	
Length	L		184	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TAUSSIG COMPANY

HJJ

www.Lcap.ch
 31.01.2013

capinfo@Lcap.ch
 faisab6154.XLS