


#6060

Metallized polypropylene capacitors

PPM 63-30.0 r K

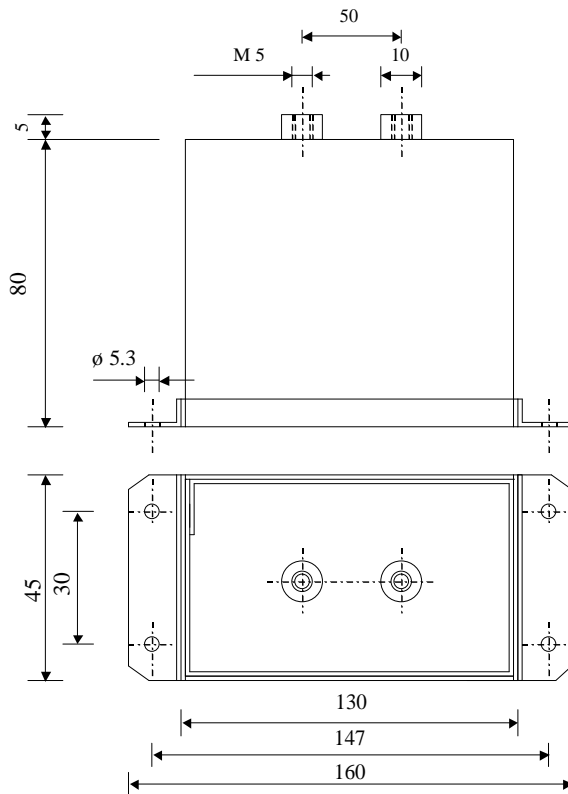

Dielectric of metallized polypropylene

Threaded outputs

Resin end sealing

Aluminium case thick 1.2 mm

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	30	μF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un DC	630	VDC	
Rated voltage	Un AC	330	Veff	50 to 100 Hz
RMS Current	Ieff max	22	Aeff	1 kHz to 100 kHz
slope of voltage variation	du/dt max.	20	V/ μsec	max. repetitive
Repetitive surge current	I cr. max	600	A	
Tangent delta	tg δ	1E	1C ⁴	1 V / 1 kHz
Equivalent serie resistance	ESR	≤ 10	m Ω	10 kHz
Stray inductance	ESL	≤ 90	nH	
Insulation resistance	Ri x C	$> 20'000$	s	500 VDC - 1 min
Test voltage between terminals	U T1	1'010	VDC	10 s
Test voltage between terminals to case	U T2	2'500	VAC	1 min
Operating temp.		- 25 / + 70 °C		
Estimated operational life (-3%)		200'000	h	Un DC / 70°C

Dimension	Symbol	Value	Unit	Conditions
Width	B	45	mm	
Length	L	130	mm	
Height	H	80	mm	
Thread		M5 x 8	mm	
Thread spacing	e	50	mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FROEYER & TOUSSAINT COMPANY

HJJ

www.Lcap.ch
 11.11.2011

capinfo@Lcap.ch
 faisab6060.XLS