
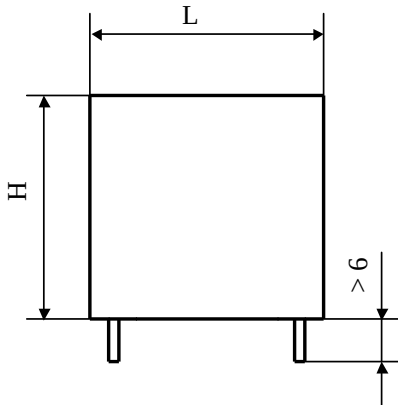

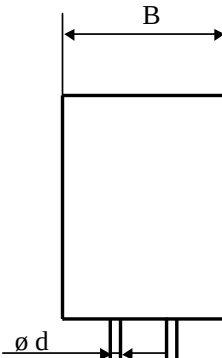


#6116	Power Electronics Capacitors	PPM-4 125-1.0 g J																																																																																																																																																																			
    Dielectric polypropylene metallized Printed circuit board mounting Self-extinguishing plastic housing																																																																																																																																																																					
<table><tr><th>Parameter</th><th>Symbol</th><th></th><th>Value</th><th>Unit</th><th>Condition</th></tr><tr><td>Capacitance</td><td>C</td><td></td><td>1</td><td>μF</td><td>1 V / 1 kHz</td></tr><tr><td>Tolerance</td><td></td><td></td><td>± 5</td><td>%</td><td></td></tr><tr><td>Rated voltage</td><td>Un DC</td><td></td><td>1250</td><td>VDC</td><td></td></tr><tr><td>Rated voltage</td><td>Un AC</td><td></td><td>500</td><td>VAC</td><td></td></tr><tr><td>RMS current</td><td>I RMS</td><td></td><td>16</td><td>Aeff</td><td>100 kHz</td></tr><tr><td>slope of voltage variation</td><td>du/dt max.</td><td></td><td>450</td><td>V/μsec</td><td></td></tr><tr><td>Tangente delta</td><td>tgδ</td><td></td><td>≤ 4</td><td>10⁻⁴</td><td>1 kHz</td></tr><tr><td>Equivalent serie resistance</td><td>ESR</td><td></td><td>≤ 5.0</td><td>mΩ</td><td>100 kHz / 23°C</td></tr><tr><td>Stray inductance</td><td>ESL</td><td></td><td>≤ 25</td><td>nH</td><td></td></tr><tr><td>Insulation resistance</td><td>Ri</td><td></td><td>> 20000</td><td>MΩ</td><td>500 VDC - 1 min</td></tr><tr><td>Test voltage between terminals</td><td>U T1</td><td></td><td>2000</td><td>VDC</td><td>10 s</td></tr><tr><td>Operating temperature</td><td></td><td></td><td>- 25 / + 85 °C</td><td></td><td></td></tr><tr><td>Estimated operational life</td><td></td><td></td><td>> 100'000</td><td>h</td><td>Un DC / 70°C</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><th>Dimension</th><th>Symbol</th><th></th><th></th><th>Unit</th><th>Conditions</th></tr><tr><td>Width</td><td>B max</td><td></td><td>28.5</td><td>mm</td><td></td></tr><tr><td>Height</td><td>H max</td><td></td><td>37.5</td><td>mm</td><td></td></tr><tr><td>Length</td><td>L max</td><td></td><td>42.5</td><td>mm</td><td></td></tr><tr><td colspan="6">Terminals</td></tr><tr><td>Radial tinned wire (4 x)</td><td>ø</td><td></td><td>1.2</td><td>mm</td><td></td></tr><tr><td>RM1</td><td></td><td></td><td>10.2 ± 0.5</td><td>mm</td><td></td></tr><tr><td>RM2</td><td></td><td></td><td>37.5 ± 0.5</td><td>mm</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td rowspan="3"></td><td>M1</td><td></td><td></td><td></td><td></td></tr><tr><td>M0</td><td>17.08.2012</td><td>HJJ</td><td></td><td></td></tr><tr><td>Modification</td><td>Date</td><td>Visa émetteur</td><td></td><td></td></tr></table>						Parameter	Symbol		Value	Unit	Condition	Capacitance	C		1	μF	1 V / 1 kHz	Tolerance			± 5	%		Rated voltage	Un DC		1250	VDC		Rated voltage	Un AC		500	VAC		RMS current	I RMS		16	Aeff	100 kHz	slope of voltage variation	du/dt max.		450	V/μsec		Tangente delta	tgδ		≤ 4	10 ⁻⁴	1 kHz	Equivalent serie resistance	ESR		≤ 5.0	mΩ	100 kHz / 23°C	Stray inductance	ESL		≤ 25	nH		Insulation resistance	Ri		> 20000	MΩ	500 VDC - 1 min	Test voltage between terminals	U T1		2000	VDC	10 s	Operating temperature			- 25 / + 85 °C			Estimated operational life			> 100'000	h	Un DC / 70°C							Dimension	Symbol			Unit	Conditions	Width	B max		28.5	mm		Height	H max		37.5	mm		Length	L max		42.5	mm		Terminals						Radial tinned wire (4 x)	ø		1.2	mm		RM1			10.2 ± 0.5	mm		RM2			37.5 ± 0.5	mm									M1					M0	17.08.2012	HJJ			Modification	Date	Visa émetteur		
Parameter	Symbol		Value	Unit	Condition																																																																																																																																																																
Capacitance	C		1	μF	1 V / 1 kHz																																																																																																																																																																
Tolerance			± 5	%																																																																																																																																																																	
Rated voltage	Un DC		1250	VDC																																																																																																																																																																	
Rated voltage	Un AC		500	VAC																																																																																																																																																																	
RMS current	I RMS		16	Aeff	100 kHz																																																																																																																																																																
slope of voltage variation	du/dt max.		450	V/μsec																																																																																																																																																																	
Tangente delta	tgδ		≤ 4	10 ⁻⁴	1 kHz																																																																																																																																																																
Equivalent serie resistance	ESR		≤ 5.0	mΩ	100 kHz / 23°C																																																																																																																																																																
Stray inductance	ESL		≤ 25	nH																																																																																																																																																																	
Insulation resistance	Ri		> 20000	MΩ	500 VDC - 1 min																																																																																																																																																																
Test voltage between terminals	U T1		2000	VDC	10 s																																																																																																																																																																
Operating temperature			- 25 / + 85 °C																																																																																																																																																																		
Estimated operational life			> 100'000	h	Un DC / 70°C																																																																																																																																																																
Dimension	Symbol			Unit	Conditions																																																																																																																																																																
Width	B max		28.5	mm																																																																																																																																																																	
Height	H max		37.5	mm																																																																																																																																																																	
Length	L max		42.5	mm																																																																																																																																																																	
Terminals																																																																																																																																																																					
Radial tinned wire (4 x)	ø		1.2	mm																																																																																																																																																																	
RM1			10.2 ± 0.5	mm																																																																																																																																																																	
RM2			37.5 ± 0.5	mm																																																																																																																																																																	
	M1																																																																																																																																																																				
	M0	17.08.2012	HJJ																																																																																																																																																																		
	Modification	Date	Visa émetteur																																																																																																																																																																		
Condensateurs Kondensatoren Capacitors CH 1400 Yverdon, Switzerland Tel.: ++41 24 445 66 88 Fax: ++41 24 445 66 89 Leclanché Capacitors A FISCHER & TAUSSCH COMPANY HJJ www.Lcap.ch 27.06.2012 capinfo@Lcap.ch faisab6116.XLS																																																																																																																																																																					