


#5648

METALLIZED POLYPROPYLENE CAPACITORS

PPM 100-016 ci J

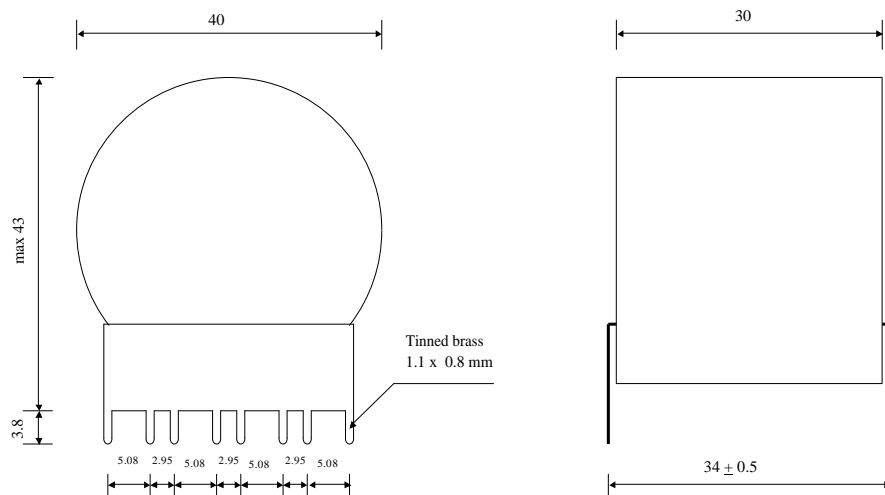

Dielectric of metallized polypropylene

Polyester wrapped / Epoxy resin sealing

Terminals for connection to printed board

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		0.16	$\mu\text{F}$	1 V / 1 kHz
Tolerance			$\pm 5$	%	
Rated voltage	Un DC		1000	VDC	
Rated voltage	Un AC		600	Veff	
Operating conditions 250 kHz	leff		55	Aeff	3 s. on / 70 s off
Maximum operating conditions 250 kHz	leff		100	Aeff	3 s. on / 230 s off
slope of voltage variation	du/dt max.		1000	V/ $\mu\text{sec}$	
Tangente delta	tg $\delta$		4	$10^{-4}$	1 V / 1 kHz
Tangente delta	tg $\delta$		4	$10^{-4}$	1 V / 10 kHz
Stray inductance	ESL		$\leq 10$	nH	
Insulation resistance	Ri		$> 100'000$	M $\Omega$	500 VDC - 1 min
Test voltage between terminals	U T1		4000	VDC	10 s
Operating temp.			- 25 / + 85 °C		
Estimated operational life (-3%)			100'000	h	With above operating conditions
Dimension	Symbol			Unit	Conditions
Diameter	$\varnothing$		40	mm	
Height	H		30	mm	
Terminals					
Tinned brass	( 8 x )		1.1 x 0.8	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Le Janché**  
**Capacitors**  
A FISCHER & TAUSSCHÉ COMPANY

HJJ

14.03.2007

faisab5648.XLS