


#6131

Discharge capacitors

PPMF 200-8.0 cs5 J

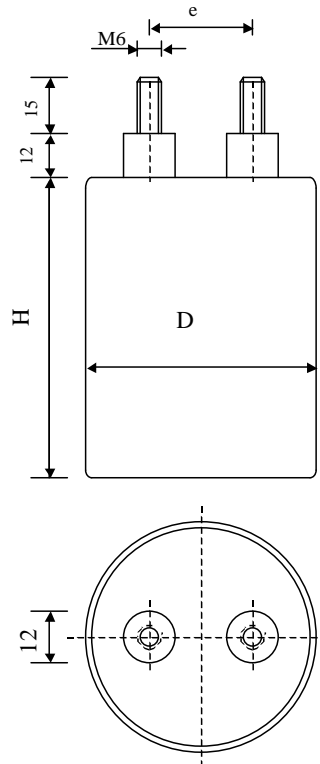

Dielectric of metallized polypropylene

Threaded outputs

Resin end sealing

Aluminium case

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	8	μF	1 V / 1 kHz
Tolerance		± 5	%	
Rated voltage	Un DC	2000	VDC	
RMS Current permanent	I _{eff max.}	30	A _{eff}	10 kHz
Repetitive surge current	I cr. max	3000	A	
Tangent delta	tgδ	≤ 6	10 ⁻⁴	1 V / 1 kHz
Equivalent serie resistance	ESR	< 5.5	mΩ	1 V / 10 kHz
Stray inductance	ESL	≤ 110	nH	
Insulation resistance	Ri x C	≥ 20'000	s	500 VDC - 1 min
Test voltage between terminals	U T1	3000	VDC	10 s
Test voltage terminals to case	U T2	3000	VAC	50 Hz / 1 min
Operating temp.		- 30 / + 70 °C		
Estimated operational life		> 10 M	Pulses	2000 V / 3 kA
Repetition rate	F	< 16	Hz	
Dimension	Symbol		Unit	Conditions
Diameter	D	65	mm	
Height	H max	130	mm	
Terminals				
Thread		M6 x 15	mm	
Thread spacing	e	24 ± 0.5	mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 447 22 82
 Capacitors Fax: ++41 24 447 22 85

Leclanché
Capacitors
A FISCHER & TALSCHER COMPANY

HJJ

www.Lcap.ch
 07.11.2012

capinfo@Lcap.ch
 faisab6131.XLS