


#6279

DISCHARGE CAPACITORS

PPMF 3000-115 uv K

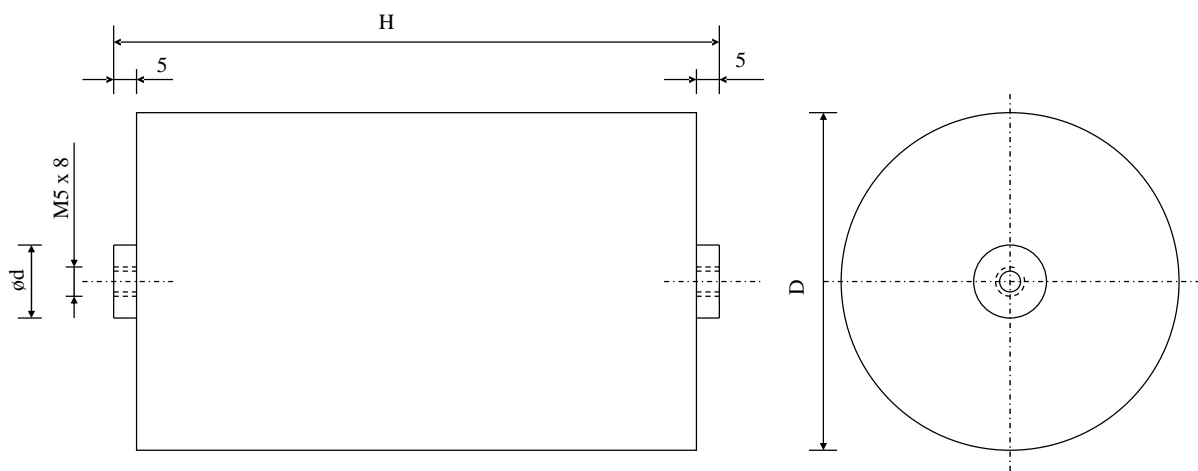

Dielectric of metallized polypropylene - Plastic tube
resin end sealing - Threaded outputs

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	0.015	μF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un DC	30000	VDC	
Slope of voltage variation	du/dt max.	100'000	V/ μs	
Repetitive surge current	I cr. max	1500	A	
Tangent delta	tg δ	≤ 10	10^{-4}	1 V / 1 kHz
Tangent delta	tg δ	≤ 10	10^{-4}	1 V / 10 kHz
Stray inductance	ESL	≤ 300	nH	
Insulation resistance	Ri	$\geq 100'000$	M Ω	500 V / 1 min
Test voltage between terminals	U T1	55000	VDC	1 min.
Climatic category		25/70/56	$^{\circ}\text{C}$	

Dimension	Symbol	Value	Unit	Conditions
Diameter	D	75	mm	
Height	H	360 ± 1.0	mm	
Terminals				
Thread		M5 x 8	mm	
	$\varnothing d$	10	mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland
Kondensatoren Tel.: ++41 24 445 66 88
Capacitors Fax: ++41 24 445 66 89

Lecaniché
Capacitors
A FRICKER & TABACCHER COMPANY

HJJ

www.Lcap.ch
28.03.2014

capinfo@Lcap.ch
faisab6279.XLS