

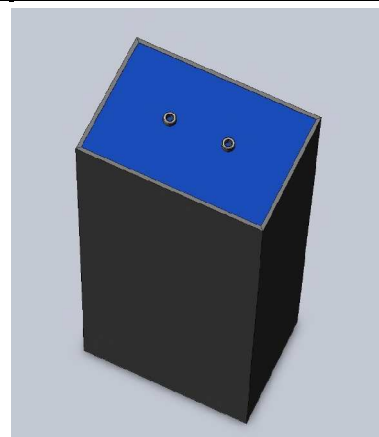


#6298

Discharge CAPACITORS

PPMF 3200-010 ru K

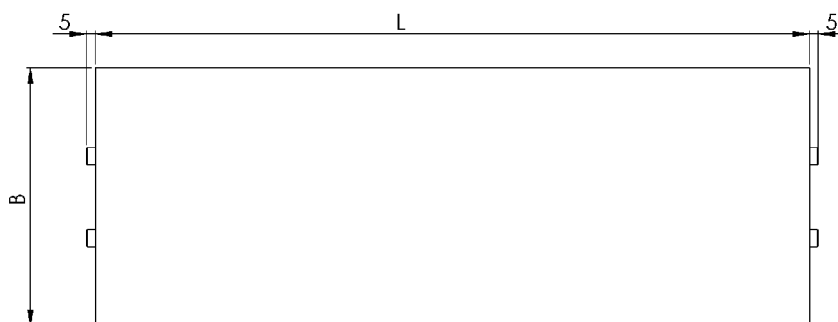

Dielectric polypropylene metallized Plastic case Polyurethane resin filled

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	0.100	µF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un DC	32'000	VDC	
Maximum Reverse Voltage	U inv.	15	%	
Maximum Peak current	I p	8	kA	
Maximum Default current	I d	1€	kA	max. 1000 X.
Maximum Repetition frequency	Fr	60	Hz	
Tangent delta	tgδ	≤ 4	10 ⁻⁴	1 V / 1 kHz
Tangent delta	tgδ	≤ 4	10 ⁻⁴	1 V / 10 kHz
Stray inductance	ESL	≤ 100	nH	
Insulation resistance	Ri	> 100'000	MΩ	500 VDC - 1 min
Test voltage between terminals	U T1	45'000	VDC	1 min.

Dimension	Symbol	Unit	Conditions
Width	B	mm	
Length	L	mm	
Height	H	mm	
Terminals (4 x)		M6 x 10	
	M1		
	M0		
	Modification	Date	Visa émetteur

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FRICKER & RAUSCHER COMPANY

HJJ

www.Lcap.ch
 14.05.2014

capinfo@Lcap.ch
 faisab6298.XLS