
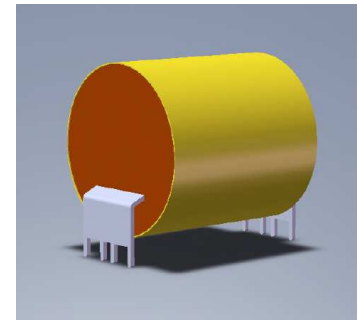


#5940

HIGH VOLTAGE METALLIZED CAPACITORS

PPMHT 400-022 CI K

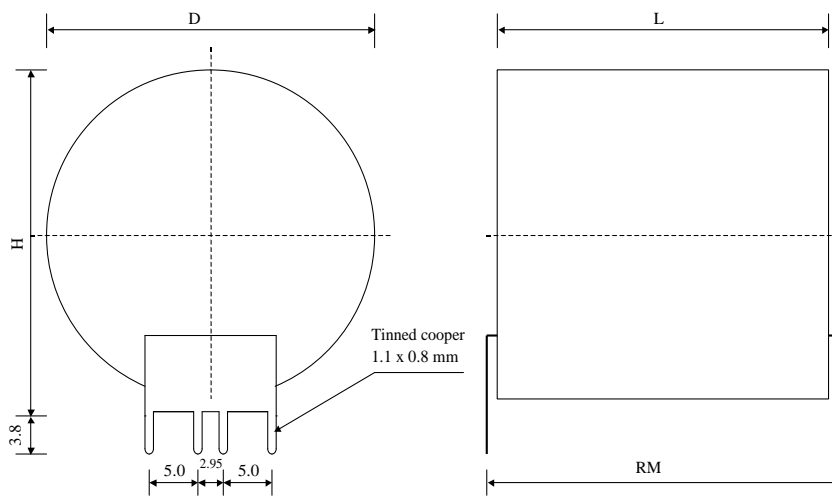

Dielectric of metallized polypropylene

Polyester wrapped flammability UL 510 / Epoxy resin sealing UL 94-V0

Terminals for connection to Printed Circuit Board

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		0.22	μF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un DC		4000	VDC	
Rated voltage	Un AC		750	Veff	50 Hz to 400 Hz
RMS current permanent	Ieff ma)		3.68	Aeff	10 kHz
slope of voltage variation	du/dt max.		275	V/μsec	
Tangent delta	tgδ		< 5	10 ⁻⁴	1 V / 1 kHz
Tangent delta	tgδ		6.4	10 ⁻⁴	1 V / 10 kHz
Stray inductance	ESL		≤ 18	nH	
Insulation resistance	Ri		> 100'000	MΩ	500 VDC - 1 min
Test voltage between terminals	U T1		6400	VDC	1 min.
Operating temp.			- 40 / + 85°C		
Estimated operational life (-3%)			> 100'000	h	Un DC / 70°C
Dimension	Symbol			Unit	Conditions
Diameter	D max		23.5	mm	
Length	L max		48	mm	
Height	H max		24.5	mm	
Terminals					
Tinned cooper	(4 x)		1.1 x 0.8	mm	
RM			52 ± 0.5	mm	
Mass approx.	m		27	g	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TAUSSCHÉ COMPANY

HJJ

www.Lcap.ch
 07.06.2010

capinfo@Lcap.ch
 faisab5940.XLS