



Features:

- Universal / Full range AC input
- Fitted with 2.1 C+ve DC jack plug
- Class II power (no earth)
- Small & Compact UK Plug design
- Switch-mode power supply

- Cost effective and high reliability
- Protections: Over Voltage, Short circuit & Over Temp.
- Approvals: GS & CE
- Level V ErP/EuP efficiency compliant
- MTBF >50,000 hours
- 1 Year Warranty




Output Characteristics									
Part Number	T4424ST	T4425ST*	T4408ST	T4487ST	T4180ST	T4549ST	T4426ST*	T4427ST*	T4428ST
Voltage	5Vdc	9Vdc	12Vdc	12Vdc	12Vdc	12Vdc	15Vdc	18Vdc	24Vdc
Current Max.	2.5A	1.67A	0.5A	1A	1.25A	1.25A	1.2A	1A	0.83A
Current Min.	0A								
Power (watts)	12.5W	15W	6W	12W	15W	15W	18W	18W	20W
Line Regulation	+/-2 %	+/-1%	+/-5%	+/-5%	+/-2 %	+/-2 %	+/-1%	+/-1%	+/-2 %
Voltage Tolerance	+/-5 %	+/-5%	+/-5%	+/-5%	+/-5%	+/-5%	+/-5%	+/-5%	+/-5%
Ripple & Noise (mV p-p)	100mV	100mV	120mV	120mV	120mV	120mV	150mV	180mV	180mV
Protections	Over Voltage: Output voltage shall be clamped by internal protection zener Short Circuit: Output shut down and auto restart Temperature: No ignition, smoke or deformation of the case								
Case Size (See below) mm	70x50x77.4	75x58.7x50	70x49.2x72.7	70x49.2x72.7	70x50x54.7	70x50x77.4	75x58.7x50	75x58.7x50	74x50x77.4
Weight (approx.)	140g	160g	140g	140g	140g	140g	160g	180g	200g
DC Cord	1.5 Metre	1.5 Metre	1.5 Metre	1.5 Metre	1.8 Metre	1.8 Metre	1.5 Metre	1.5 Metre	1.5 Metre
DC Plug (mm)	Straight 2.1C+ve	Straight 2.1C+ve	R-A 2.1C+ve	Straight 2.1C+ve	Straight 2.1C+ve	R-A 2.1C+ve	Straight 2.1C+ve	Straight 2.1C+ve	Straight 2.1C+ve
* Upgrade to Level V efficiency pending									

[illegible]


Safety, Mechanical and Other Characteristics	
Range Model Designations	SAW24, DSA-12PFA, DSA-15P & DSA-20P (specified individually on each product label)
Hi-Pot Specification	3000VAC 10mA 1minute or 4242VDC 10mA 1minute (I.P. to O.P.)
Insulation Resistance	500Vdc to test the I.P-O.P resistance not less than 100Mohm (I.P. to O.P.)
Operating Temperature	0°C to 40°C
Storage Temperature	-10°C to 70°C
Operating Humidity	20% to 80%
Storage Humidity	10% to 90%
Safety Approvals	T-LICENSE(BS EN60950-1)
EMI Standards	CE(EN55022)
PB-free	Yes. RoHS Compliant
MTBF	50K Hours (mean time before failure)

Case Drawings:


- 75x58.7x50:

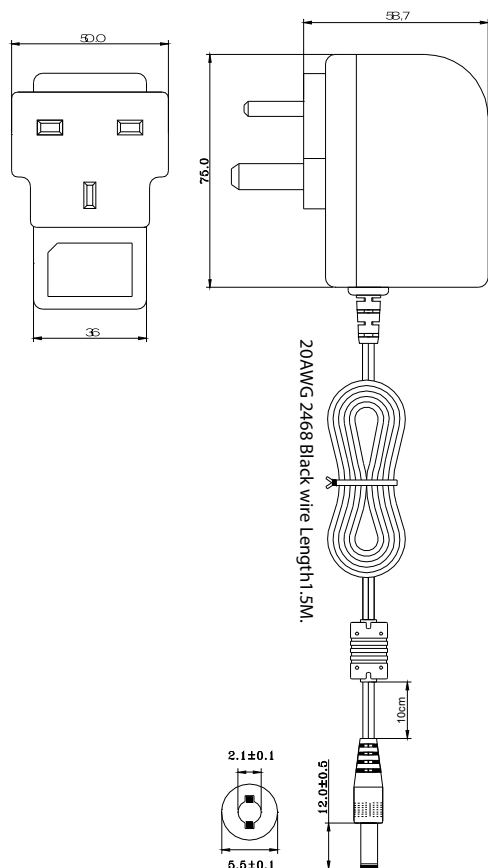

- 70x50x71.7:

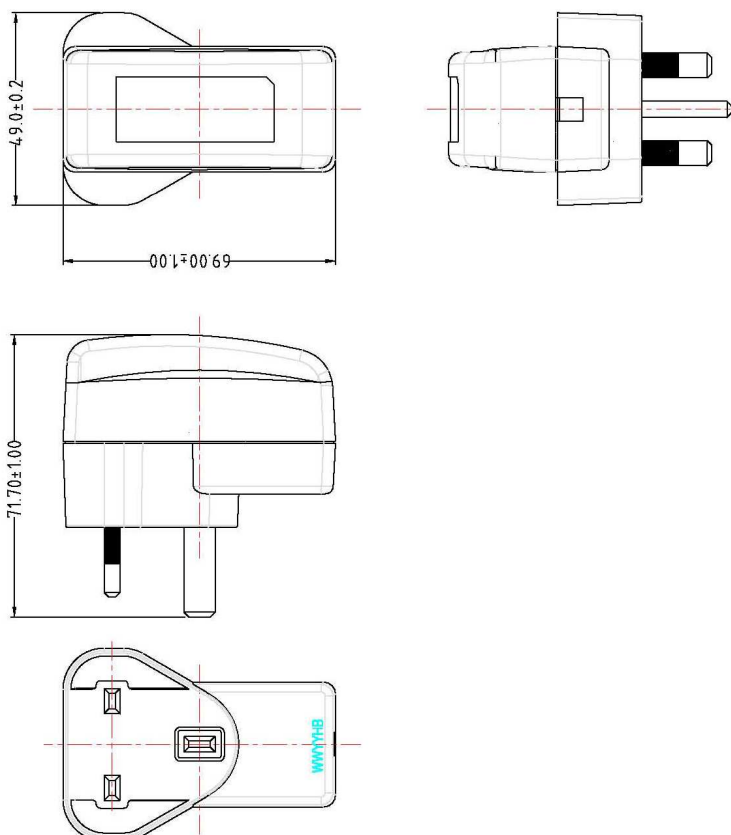

- 73.5x59.5x76.7:

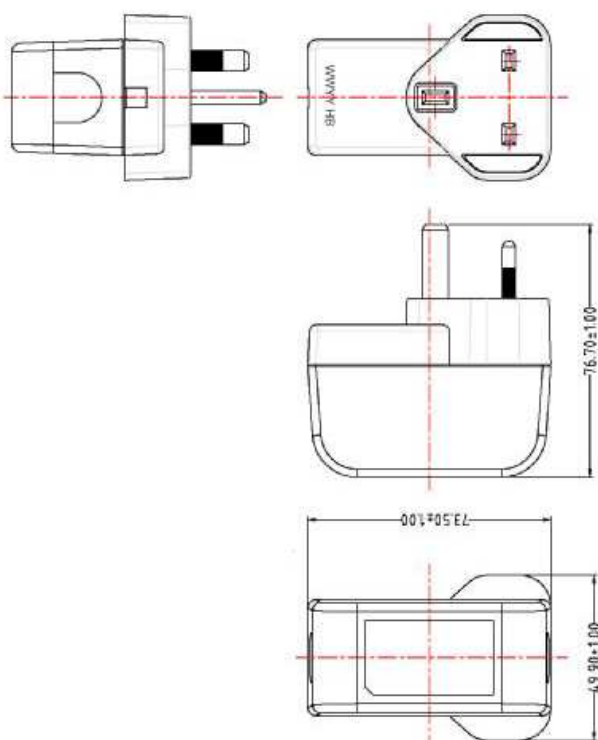

- 70x50x76.4:

