

Interchangeable Plug & Go (with C8 Inlet) AC-DC SMPSU Range

Product Image



Product Range

Part Number	Input Voltage	Output Voltage	Output Current
T5560ST	90~264 VAC 47-63Hz	3Vdc	3Amp
T5561ST	90~264 VAC 47-63Hz	5Vdc	2.5Amp
T5562ST	90~264 VAC 47-63Hz	9Vdc	1.2Amp
T5563ST	90~264 VAC 47-63Hz	12Vdc	1Amp
T5564ST	90~264 VAC 47-63Hz	24Vdc	0.5Amp


NB: This style of power supply is available in 6 to 30 Watt's and any voltage between 3Vdc and 30Vdc.

Features & Safety

EuP/ErP V Efficiency Compliant
Efficiency 65~80% Typical
Over Voltage, Over Temp, Over Current & Short Circuit Protections
Operating Temperature 0~40°C
Interchangeable AC Heads:
UK, USA, EURO, Australian or C8 Mains Inlet
Unique Ability to be used as a Desk Top as well

Approved to UL, cUL, TUV, CB, PSE, SAA
RoHS & CE Compliant
Limited Power Source (LPS)

Mechanical Drawings (mm)

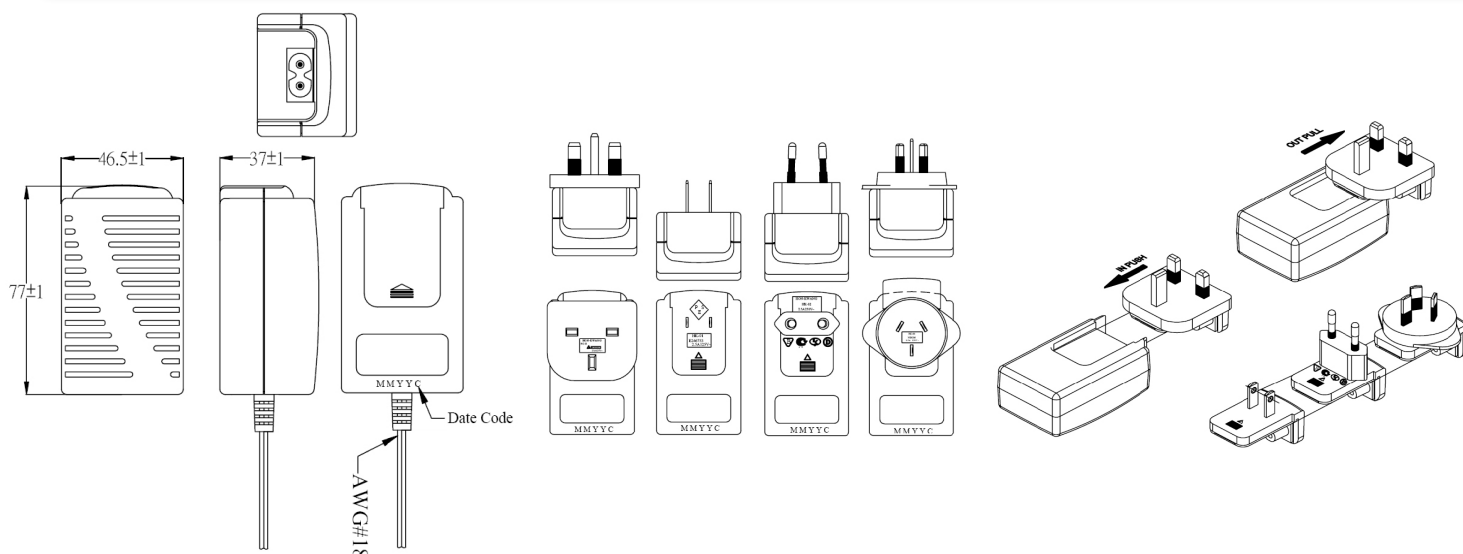

Disclaimer & About

Stontronics Ltd accepts no responsibility for typographical errors in the production of this leaflet. Product specifications are subject to change without notice.

For more information please contact us:
Stontronics Ltd,
Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH
Tel: 0118 931 1199 • Fax: 0118 931 1145 • Email: info@stontronics.co.uk • www.stontronics.co.uk

Stontronics Ltd is ISO 9001:2008 registered.

