


Model Number: **SNP20 - Slimline 20 Watt Constant Current LED Driver Range**

Product Image




SELV



• BAUART
GEPRÜFT
• TYPE
APPROVED



Mechanical Drawings (mm)

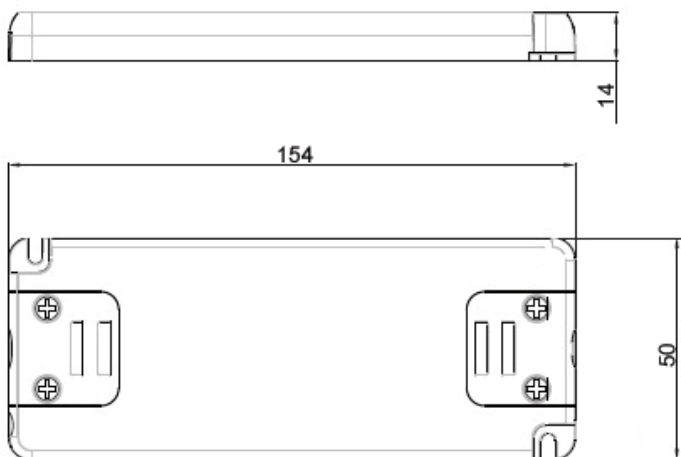

Disclaimer

Stontronics Ltd accepts no responsibility for typographical errors in the production of this leaflet. Product specifications are subject to change without notice.

For more information please contact us:

Stontronics Ltd,
Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH
Tel: 0118 931 1199
Fax: 0118 931 1145
Email: info@stontronics.co.uk • www.stontronics.co.uk

Technical Data

Input

Input Voltage 200-240Vac
Input Voltage Range 180-264Vac
Frequency 50 Hz
Mains Input Style Terminal block

Output

Output Power 20 Watts
Protections Open Circuit; Short Circuit; Over Load; Over Heat

Model	Constant Current	Load	Max. Voltage	Power Factor
SNP20-350IF	350mA	0~20W	56Vdc	>0.5
SNP20-500IF	500mA	0~20W	40Vdc	>0.5
SNP20-700IF	700mA	0~20W	29Vdc	>0.5

Other

Max Ambient Temp (Ta) 45°C (Case Temp (Tc) 80°C)
Dimensions 154x50x14 (LxWxH in mm)
Body Construction PC (Polycarbonate)

Safety

Safety According to EN61347-1, EN61347-2-13
EMI According to EN55015
EMS According to EN61000-3-2; EN61000-3-3; EN61547
Approval Body Mark: CE ROHS; TUV