

Model Number: **SNP30 - Slimline 30 Watt Constant Current LED Driver Range**

Product Image




SELV



• BAUART
GEPRÜFT
• TYPE
APPROVED



Mechanical Drawings (mm)

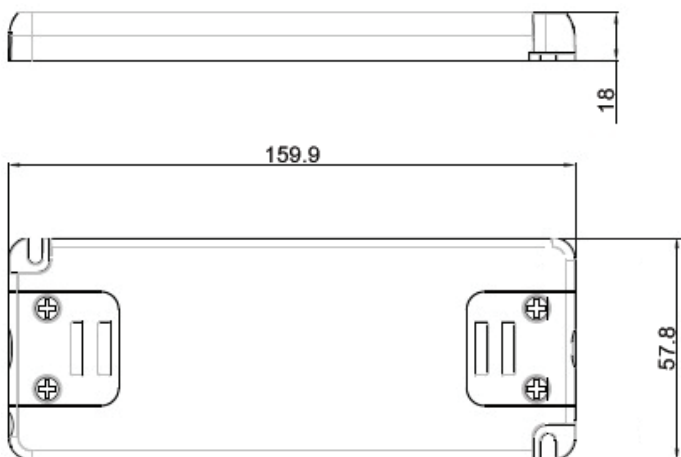

Disclaimer

Stontronics Ltd accepts no responsibility for typographical errors in the production of this leaflet. Product specifications are subject to change without notice.

For more information please contact us:

Stontronics Ltd,
 Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH
 Tel: 0118 931 1199
 Fax: 0118 931 1145
 Email: info@stontronics.co.uk • www.stontronics.co.uk

Technical Data

Input

Input Voltage 200-240Vac
 Input Voltage Range 180-264Vac
 Frequency 50 Hz
 Mains Input Style Terminal block

Output

Output Power 30 Watts
 Protections Open Circuit; Short Circuit; Over Load; Over Heat

Model	Constant Current	Load	Max. Voltage	Power Factor
SNP30-700IF	700mA	0~30W	42Vdc	0.9
SNP30-1100IF	1100mA	0~30W	27Vdc	0.9
SNP30-1400IF	1400mA	0~30W	21Vdc	0.9

Other

Max Ambient Temp (Ta) 45°C (Case Temp (Tc) 80°C)
 Dimensions 159.9 x 57.8 x 18 (LxWxH in mm)
 Body Construction PC (Polycarbonate)

Safety

Safety According to EN61347-1, EN61347-2-13
 EMI According to EN55015
 EMS According to EN61000-3-2; EN61000-3-3; EN61547
 Approval Body Mark: CE ROHS; TUV