



Features:

- Universal / Full range AC input
- Works with all Apple & Andriod products
- Multiple USB Outputs
- Small & Compact Design
- MTBF >50,000 hours
- 1 Year Warranty



Output Characteristics

Part Number	T5708ST	T5709ST	T5710ST
Voltage	+5V	+5V	+5V
Current Max.	6.8A	10A	10A
Current Min.	0A		
Leakage Current	0.25mA @ 264Vac	0.25mA @ 264Vac	0.25mA @ 264Vac
No. of Outputs	4	6	8
Output Type	USB 2.0	USB 2.0	USB 2.0
Ripple & Noise (mV p-p)	280mVp-p	240mVp-p	240mVp-p
Protections	Over Current: Output shall hiccup until fault is removed Short Circuit: Output shut down and auto restart		
Case Size (See below) mm	90.3mm x 73mm x 32.6mm	180mm x 60mm x 34mm	180mm x 60mm x 34mm

Input Characteristics


Rated Input Voltage	100-240Vac		
Full Input Voltage Range	90-254Vac		
Rated Frequency	50-60Hz		
Full Frequency Range	47-63Hz		
Efficiency (avg.)	80%	76%	76%
Input Type	C8 Socket	C8 Socket	C8 Socket

Safety, Mechanical and Other Characteristics


Range Model Designations	HC362-4U, HC501-6U, HC501-8U
Operating Temperature	0°C to 40°C
Storage Temperature	-10°C to 70°C
Operating Humidity	10% to +90%
Storage Humidity	5% to 95%
PB-free	Yes. RoHS Compliant
MTBF	50K Hours (mean time before failure)

Case Drawings:

T5708ST:

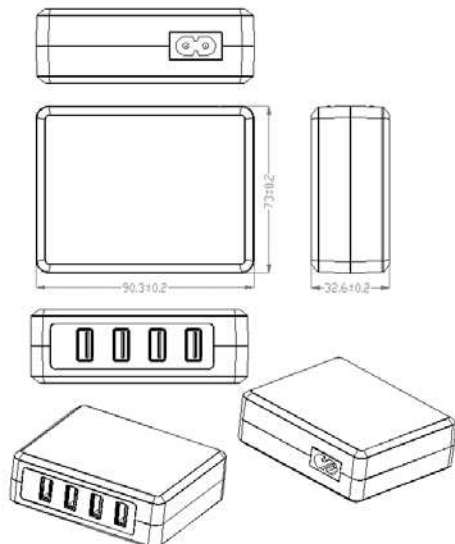

T5709ST:

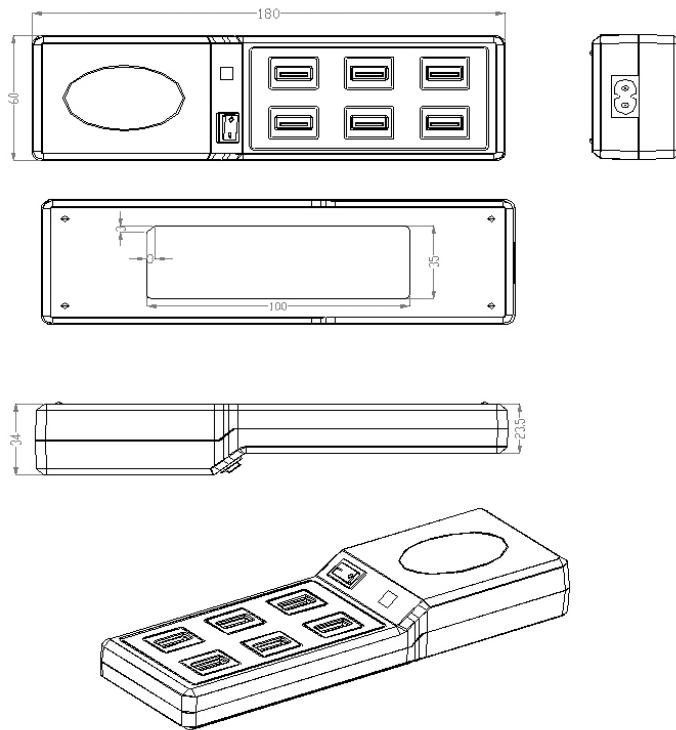

T5710ST:

