


Part Number: **T4804ST - 15VDC 3Amp C14 Desktop SMPSU**

Product Image

Level  Compliant



Mechanical Drawings (mm)

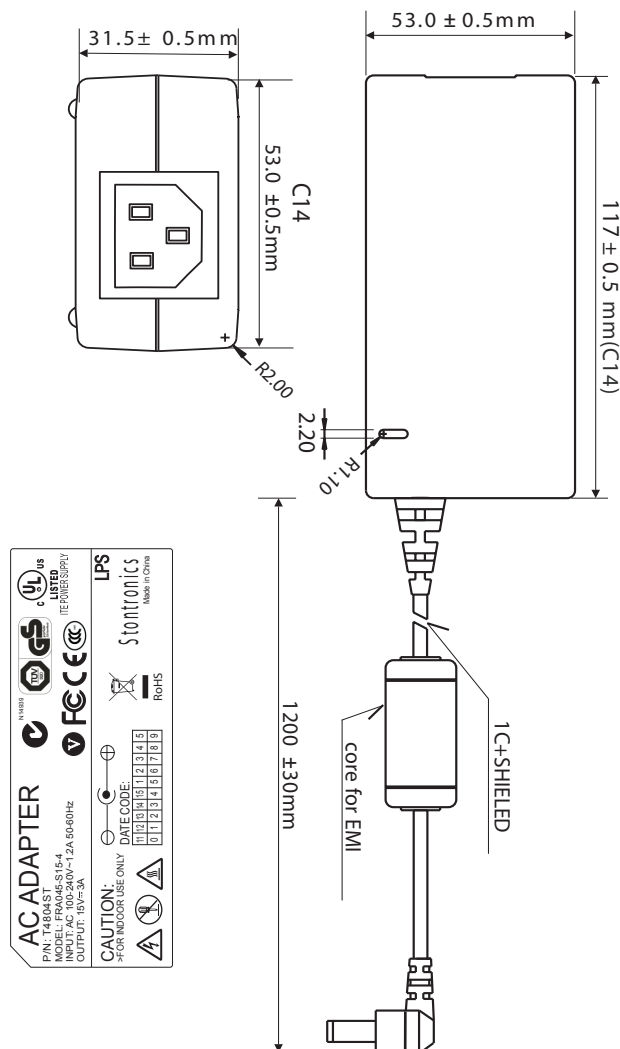

Input

Input Voltage Rating 100-240VAC
 Input Frequency 47 - 63 Hz
 Input Current 1.5A RMS Max
 Inrush Current No Damage at 240VAC Cold Start
 Hold Up Time 10mS at Nominal Line
 Input Power (with no load)..... <0.5W
 AC Inlet IEC320 C14 (Kettle Style)

Output

Output Voltage 15VDC
 Minimum Load Current 0 Amp
 Nominal Load Current 3Amp
 Nominal Load Power 45Watts
 Load Regulation +/- 5 %
 Ripple And Noise 2% p-p Maximum
 Efficiency meets ErP/EuP Level V
 Protections OCP, OVP, Over Power & Short Circuit
 DC Cord & Plug 1Meter w/ Straight 2.1 x 5.5 x 12mm C+ve

Other

Dimensions 117(L) * 53 (W) * 53 (H) mm Max.
 Weight approx. 340g
 MTBF 50,000 hours @ 25°C
 Operating Temperature -10 °C To 50 °C
 Storage Temperature -20 °C To 85 °C
 Operating Humidity 20 ~ 80 % Rh. Non-Condensing
 Storage Humidity 10 ~ 90 % Rh. Non-Condensing

Safety

EMI Standards

Meet FCC class B (EN55022, CISPR22) & CE

Safety Standards

Safety approved to: UL/CUL, GS, CCC & C-Tick

RoHS Compliant

Hi-Pot 4242VDC & Insulation resistance tested

Disclaimer

Stontronics Ltd accepts no responsibility for typographical errors in the production of this leaflet. Product specifications are subject to change without notice.

Stontronics Ltd is ISO 9001:2008 registered.



For more information please contact us:

Stontronics Ltd,
 Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH

Tel: 0118 931 1199

Fax: 0118 931 1145

Email: info@stontronics.co.uk • www.stontronics.co.uk