


type MSU 60 LP open

75 ... 122 VA


 (approvals in preparation)

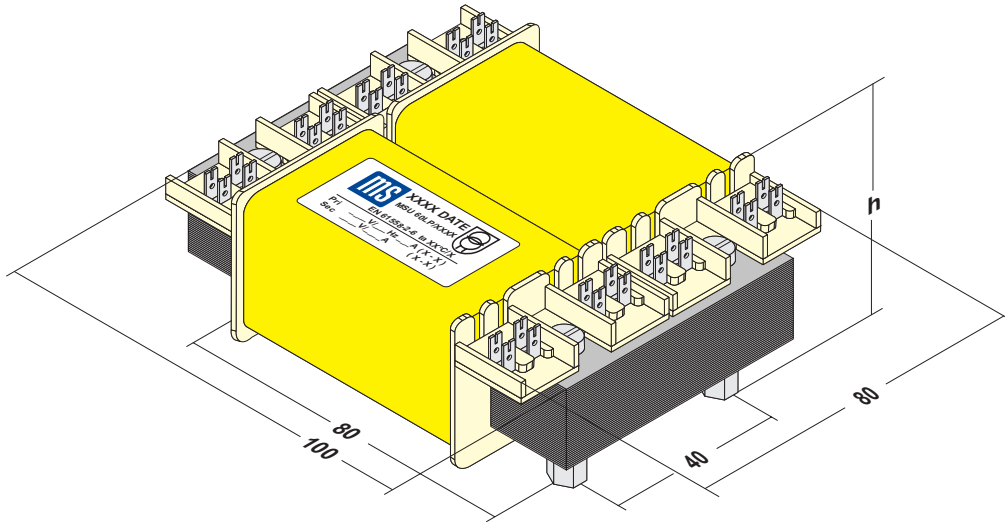


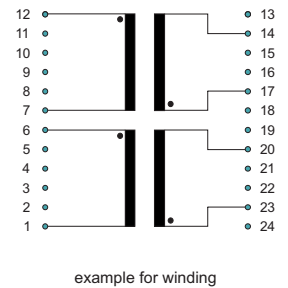



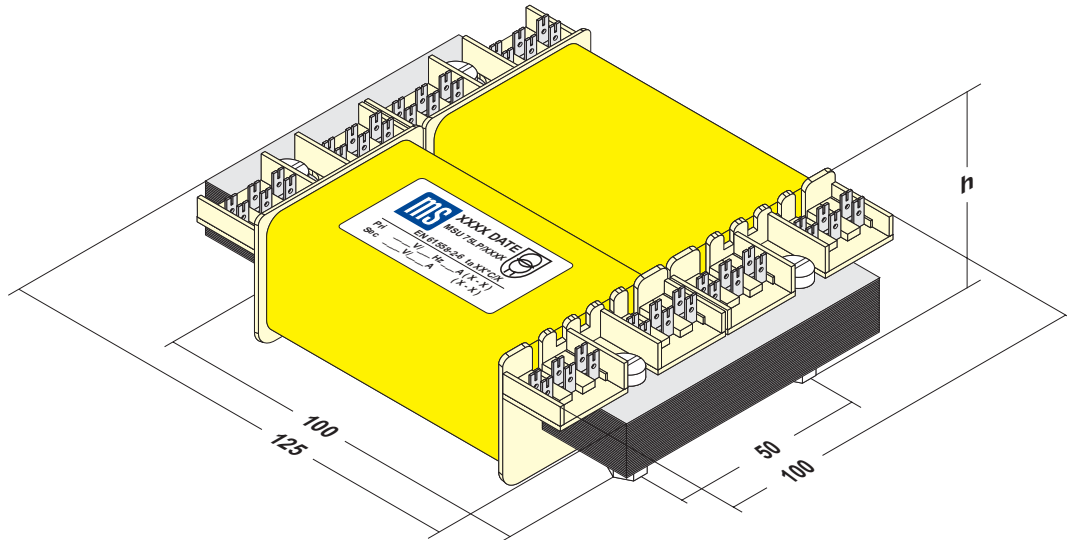
UI 60	type size [mm]	height h [mm]	power [VA]			
			ta 40°C/B		ta 70°C/B	
			compact	economy	compact	economy
	MSU 60LP/21	41	122	100	90	75

- * safety transformer satisfying EN 60742 (VDE 0551) / EN 61558-2-6 (U_o < 50 V)
- * construction in 1-chamber style with > 6 mm creepage and clearance
- * complete construction with UL-approved material
- * U_o > 50 V: insulating transformer satisfying EN 61558-2-4
- * advantageous price / quality ratio
- * optional: temperature fuse / temperature switch
- * optional: 4 distance bolt M4 x 10

type MSU 75 LP open

95 ... 490 VA


 (approvals in preparation)



UI 75	type size [mm]	height h [mm]	power [VA]			
			ta 40°C/B		ta 70°C/B	
			compact	economy	compact	economy
	MSU 75LP/16	40	190	125	140	95
	MSU 75LP/41,5	66	490	320	360	240

- * safety transformer satisfying EN 60742 (VDE 0551) / EN 61558-2-6 (U_o < 50 V)
- * construction in 1-chamber style with > 6 mm creepage and clearance
- * complete construction with UL-approved material
- * U_o > 50 V: insulating transformer satisfying EN 61558-2-4
- * advantageous price / quality ratio
- * optional: temperature fuse / temperature switch
- * optional: 4 distance bolt M5 x 13